

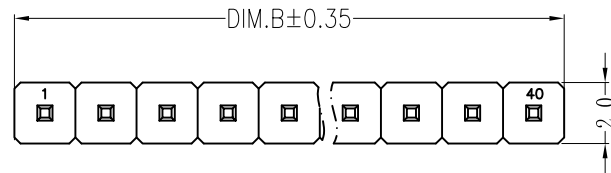


| E   |             | F      |            |
|-----|-------------|--------|------------|
| REV | DESCRIPTION | DESIGN | DATE       |
| A   | NEW RELEASE | 宋鹏翔    | 2023/11/14 |
|     |             |        |            |



| No. of Pin/Row | Dimension |      |
|----------------|-----------|------|
|                | A         | B    |
| 02             | 2.0       | 4.0  |
| 03             | 4.0       | 6.0  |
| 04             | 6.0       | 8.0  |
| 05             | 8.0       | 10.0 |
| 06             | 10.0      | 12.0 |
| 07             | 12.0      | 14.0 |
| 08             | 14.0      | 16.0 |
| 09             | 16.0      | 18.0 |
| 10             | 18.0      | 20.0 |
| 11             | 20.0      | 22.0 |
| 12             | 22.0      | 24.0 |
| 13             | 24.0      | 26.0 |
| 14             | 26.0      | 28.0 |
| 15             | 28.0      | 30.0 |
| 16             | 30.0      | 32.0 |
| 17             | 32.0      | 34.0 |
| 18             | 34.0      | 36.0 |
| 19             | 36.0      | 38.0 |
| 20             | 38.0      | 40.0 |
| 21             | 40.0      | 42.0 |
| 22             | 42.0      | 44.0 |
| 23             | 44.0      | 46.0 |
| 24             | 46.0      | 48.0 |
| 25             | 48.0      | 50.0 |
| 26             | 50.0      | 52.0 |
| 27             | 52.0      | 54.0 |
| 28             | 54.0      | 56.0 |
| 29             | 56.0      | 58.0 |
| 30             | 58.0      | 60.0 |
| 31             | 60.0      | 62.0 |
| 32             | 62.0      | 64.0 |
| 33             | 64.0      | 66.0 |
| 34             | 66.0      | 68.0 |
| 35             | 68.0      | 70.0 |
| 36             | 70.0      | 72.0 |
| 37             | 72.0      | 74.0 |
| 38             | 74.0      | 76.0 |
| 39             | 76.0      | 78.0 |
| 40             | 78.0      | 80.0 |

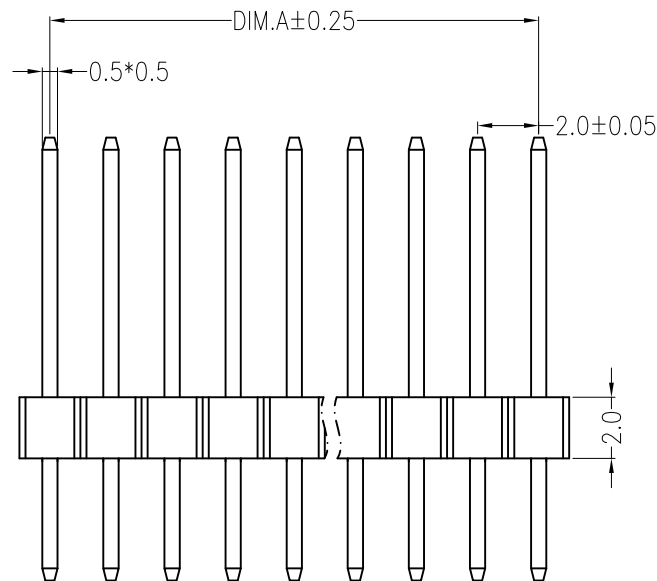

Specifications:

Contact resistance:  $\leq 20\text{m}\Omega$

Insulation resistance:  $\geq 1000\text{M}\Omega$

Rated voltage:125V AC DC

Rated current:2.0A AC DC



Withstand Voltage: 500V AC/minute

Temperature Range:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Housing:PA6T UL94V-0,BLACK

Contacts:Brass/Sn-plated

ORDER INFORMATION:

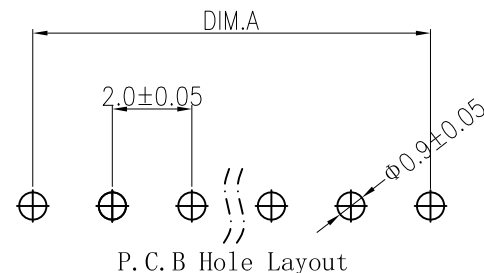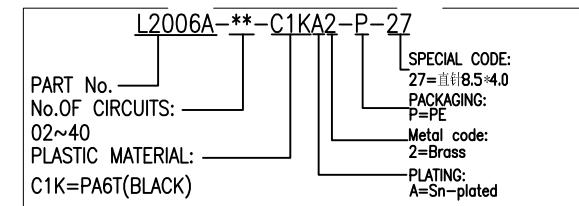

|                                                                                                                                                                             |                     |                         |                                          |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------|------------------------------------------|--|
|  <b>温州健坤接插件有限公司</b><br><b>WENZHOU JKUN CONNECTOR CO.,LTD.</b>                          |                     |                         | <b>TITLE:</b><br>-                       |  |
| <b>GENERAL TOLERANCE</b>                                                                                                                                                    |                     | <b>USE:</b><br>CUSTOMER | <b>PART NO.:</b><br>L2006A-**-C1KA2-P-27 |  |
| X.X ±0.30                                                                                                                                                                   | X. ±5'              | <b>APPD:</b><br>姚建军     |                                          |  |
| X.XX ±0.20                                                                                                                                                                  | X.X ±2'             | <b>CHKD:</b><br>颜鹏      | <b>DWG NO.:</b><br>JKUN-GCKH-2666        |  |
| X.XXX ±0.10                                                                                                                                                                 | X.XX ±1'            |                         | <b>SCALE</b><br>1 : 1                    |  |
|   | <b>UNITS:</b><br>mm | <b>DR:</b><br>宋鹏翔       | <b>SHEET</b><br>1 / 1                    |  |

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A0  |         | Release     | 蒋建银    | 2019.05.13 |
|     |         |             |        |            |

| pin number | dim A | dim B |
|------------|-------|-------|
| 2*2 pin    | 4.0   | 2.0   |
| 2*3 pin    | 6.0   | 4.0   |
| 2*4 pin    | 8.0   | 6.0   |
| 2*5 pin    | 10.0  | 8.0   |
| 2*6 pin    | 12.0  | 10.0  |
| 2*7 pin    | 14.0  | 12.0  |
| 2*8 pin    | 16.0  | 14.0  |
| 2*9 pin    | 18.0  | 16.0  |
| 2*10 pin   | 20.0  | 18.0  |
| 2*11 pin   | 22.0  | 20.0  |
| 2*12 pin   | 24.0  | 22.0  |
| 2*13 pin   | 26.0  | 24.0  |
| 2*14 pin   | 28.0  | 26.0  |
| 2*15 pin   | 30.0  | 28.0  |
| 2*16 pin   | 32.0  | 30.0  |
| 2*17 pin   | 34.0  | 32.0  |
| 2*18 pin   | 36.0  | 34.0  |
| 2*19 pin   | 38.0  | 36.0  |
| 2*36 pin   | 72.0  | 70.0  |
| 2*40 pin   | 80.0  | 78.0  |


主要技术参数 Main Specifications

线 数 (Poles): 04 to 80  
接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$   
绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$   
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range):  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

|                      |  |                 |  |
|----------------------|--|-----------------|--|
| L2006A-2**-C1KC2-P-2 |  | SPECIAL CODE:   |  |
| PART No.             |  | 2=直针3.90*2.8    |  |
| No. FOR CIRCUITS:    |  | PACKAGING:      |  |
| 2*2~2*40             |  | P=PE            |  |
| PLASTIC MATERIAL:    |  | Metal material: |  |
| C1K=PA6T (black)     |  | 2=Brass         |  |
|                      |  | PLATING:        |  |
|                      |  | C=GOLD FLASH    |  |

|                                                     |           |           |                            |                |
|-----------------------------------------------------|-----------|-----------|----------------------------|----------------|
| C                                                   |           |           |                            |                |
| B                                                   | CONTACT   |           | n PCS                      | Copper Alloy   |
| A                                                   | HOUSING   |           | 1 PCS                      | PA6T           |
| ITEM                                                | COMPONENT | Q'TY      | MATERIAL                   | FINISH         |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |           |                            | TITLE: -<br>-  |
| X.±0.5                                              | X.±5'     | USE:      | CUSTOMER                   |                |
| .X±0.3                                              | .X±2'     | APPD: 刘振岭 |                            |                |
| .XX±0.25                                            | .XX±1'    | CHKD: 王亮  | DWG NO.:<br>JKUN-GCCP-1366 |                |
| --                                                  | --        | DR: 蒋建银   |                            |                |
| ⊕                                                   | ⊕         | UNITS: mm | DR: 蒋建银                    | SCALE<br>1 : 1 |
|                                                     |           |           |                            | SHEET<br>1 / 1 |

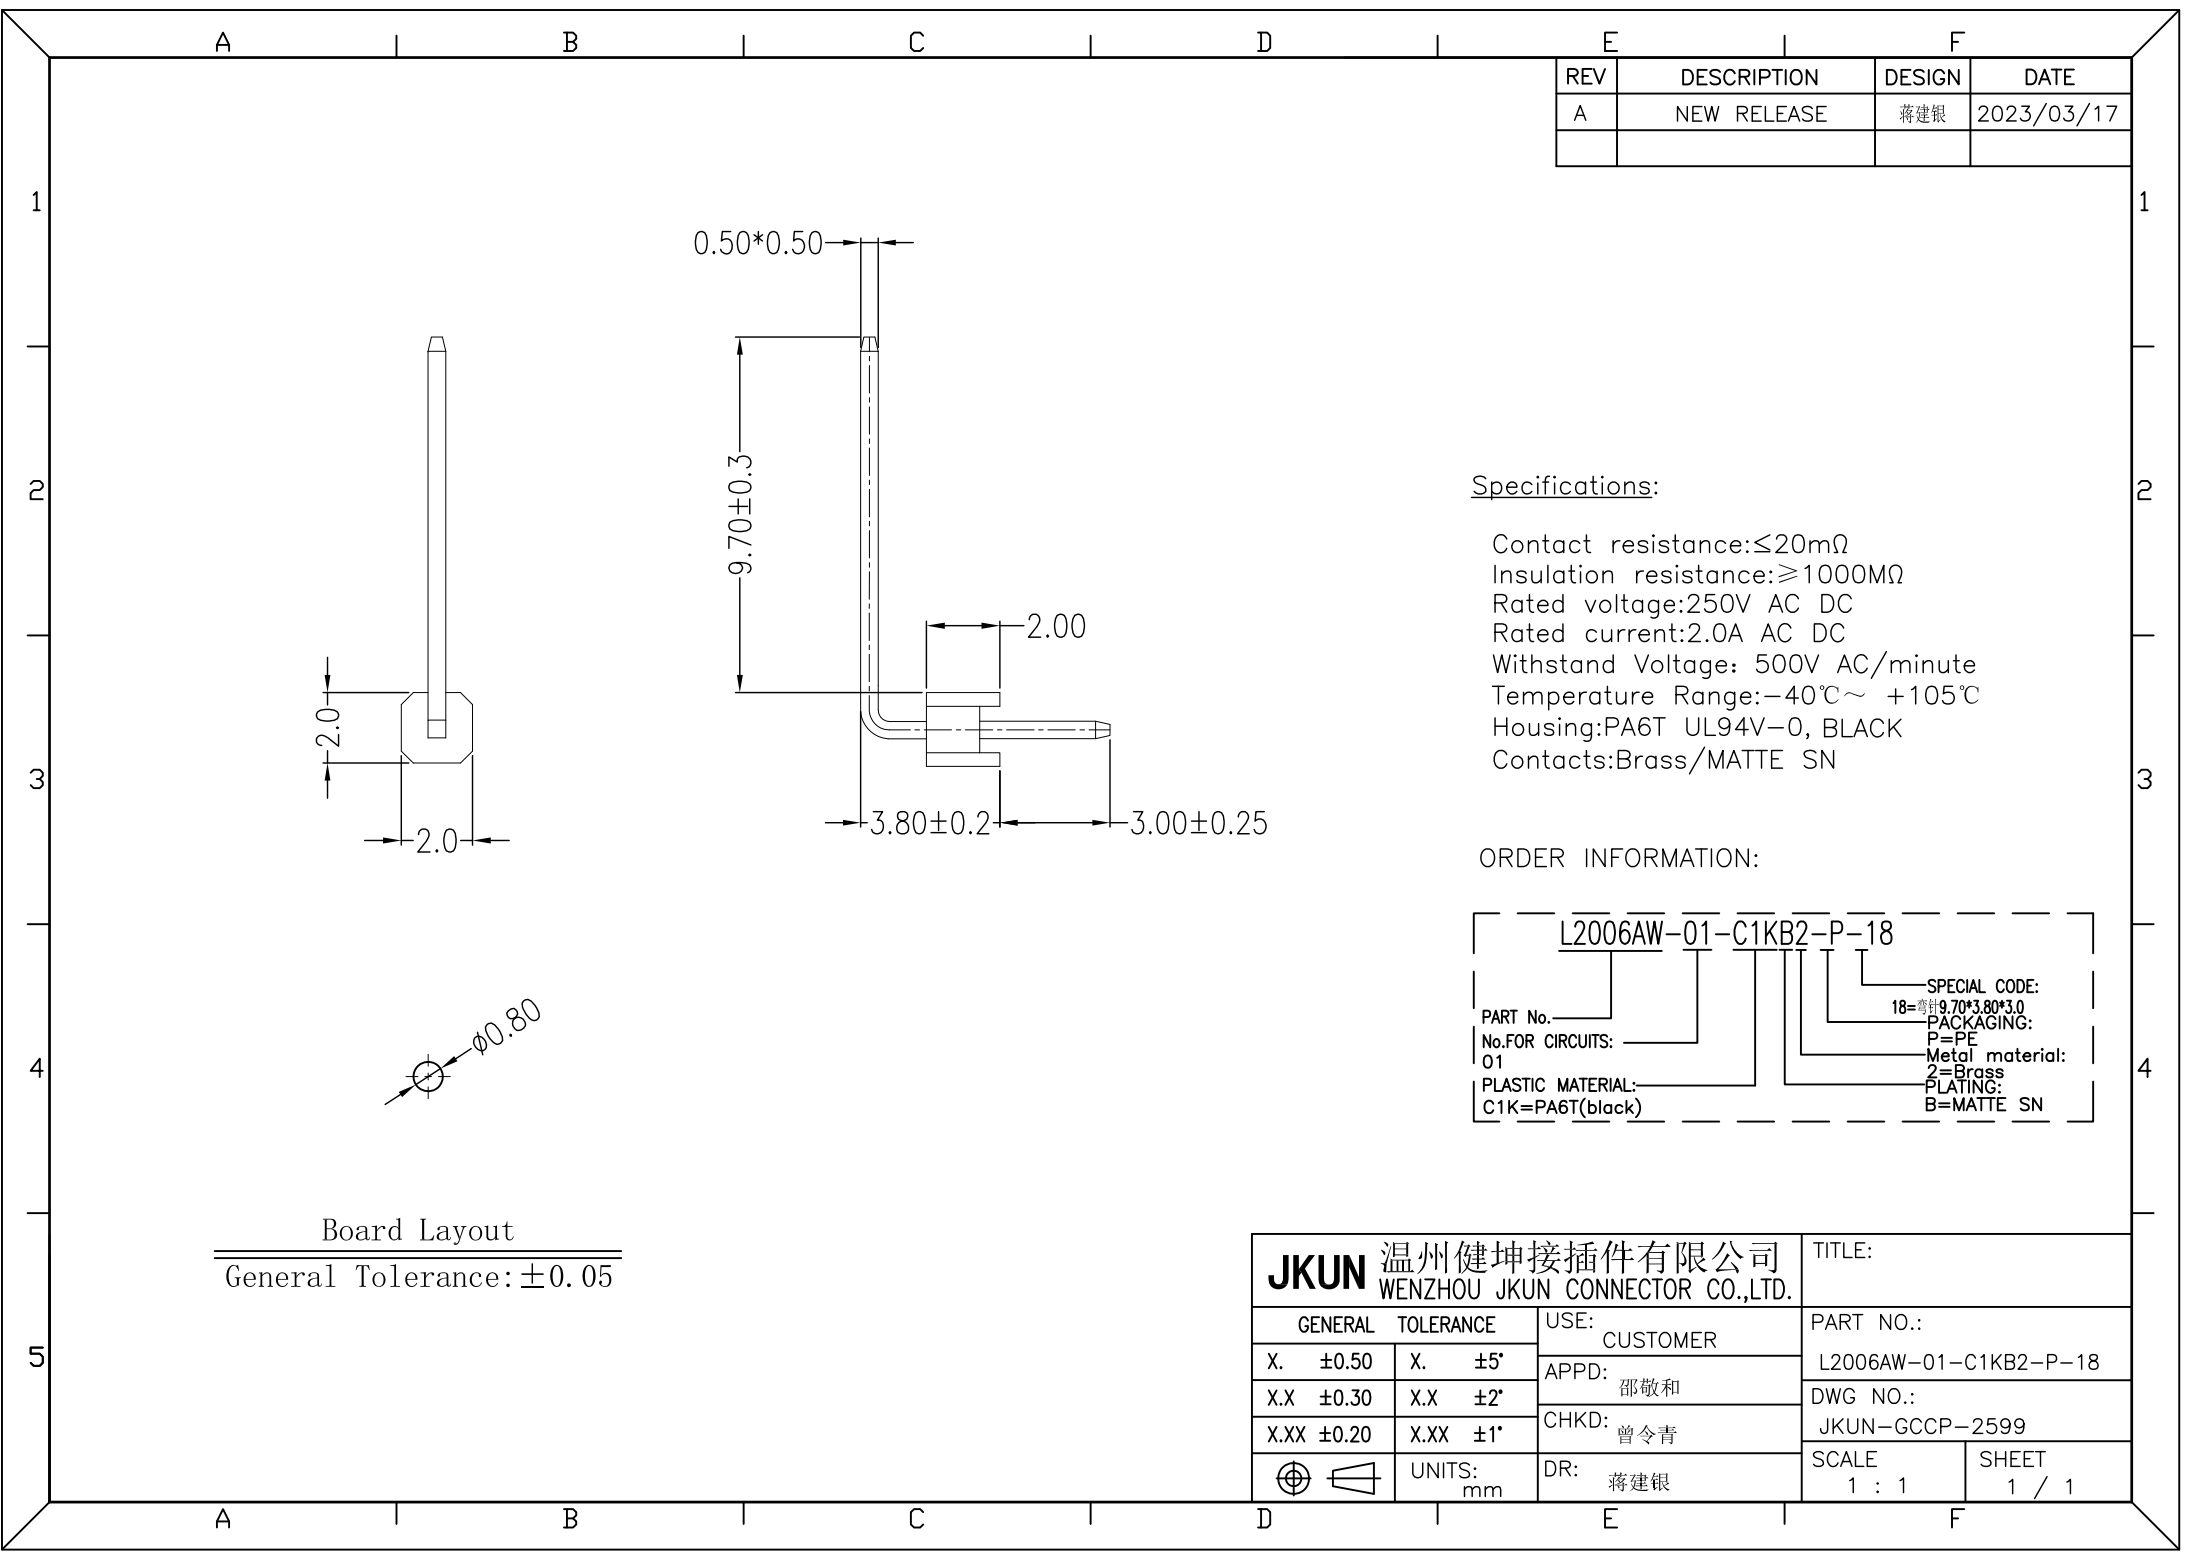

| REV | DESCRIPTION | DESIGN | DATE       |
|-----|-------------|--------|------------|
| A   | NEW RELEASE | 蒋建银    | 2023/03/17 |
|     |             |        |            |

Specifications:

Contact resistance:≤20mΩ  
Insulation resistance:≥1000MΩ  
Rated voltage:250V AC DC  
Rated current:2.0A AC DC  
Withstand Voltage: 500V AC/minute  
Temperature Range:−40℃~ +105℃  
Housing:PA6T UL94V−0, BLACK  
Contacts:Brass/MATTE SN

ORDER INFORMATION:




|                       |                 |                 |                    |
|-----------------------|-----------------|-----------------|--------------------|
| L2006AW-01-C1KB2-P-18 |                 |                 |                    |
| PART No.              |                 | SPECIAL CODE:   | 18=弯针9.70*3.80*3.0 |
| No.FOR CIRCUITS:      | 01              | PACKAGING:      | P=PE               |
| PLASTIC MATERIAL:     | C1K=PA6T(black) | Metal material: | 2=Brass            |
|                       |                 | PLATING:        | B=MATTE SN         |

Board Layout  
General Tolerance:±0.05

|                                                     |           |           |                       |       |
|-----------------------------------------------------|-----------|-----------|-----------------------|-------|
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |           | TITLE:                |       |
| GENERAL TOLERANCE                                   |           | USE:      | PART NO.:             |       |
| X. ±0.50                                            | X. ±5'    | CUSTOMER  | L2006AW-01-C1KB2-P-18 |       |
| X.X ±0.30                                           | X.X ±2'   | APPD: 邵敬和 | DWG NO.:              |       |
| X.XX ±0.20                                          | X.XX ±1'  | CHKD: 曾令青 | JKUN-GCCP-2599        |       |
|                                                     | UNITS: mm | DR: 蒋建银   | SCALE                 | SHEET |
|                                                     |           |           | 1 : 1                 | 1 / 1 |

|                     |     |          |
|---------------------|-----|----------|
| A                   | B   | C        |
| Customized products | MOQ | 50000PCS |

|              |             |
|--------------|-------------|
| E            | F           |
| REV          | DESCRIPTION |
| A            | NEW RELEASE |
| DESIGN       | DATE        |
| Jiangjianyin | 2023/03/22  |

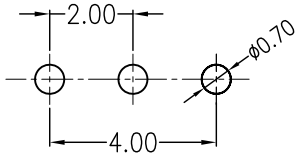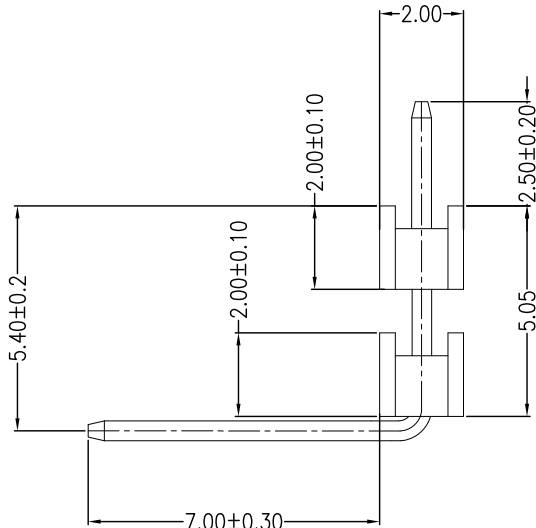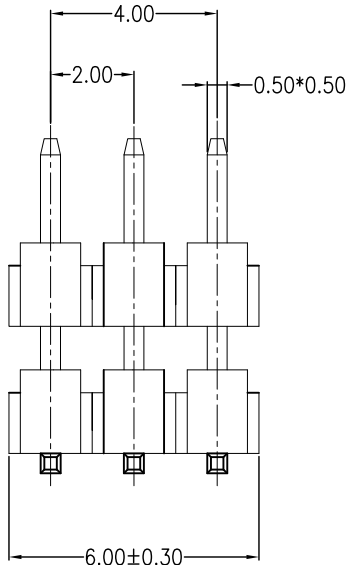


Board Layout  
General Tolerance: ±0.05

Specifications:

Contact resistance:≤20mΩ  
Insulation resistance:≥1000MΩ  
Rated voltage:250V AC DC  
Rated current:2.0A AC DC  
Withstand Voltage: 500V AC/minute  
Temperature Range:−40℃~ +105℃  
Housing:PA6T UL94V−0,BLACK  
Contacts:Brass/SN





ORDER INFORMATION:

|                       |                 |
|-----------------------|-----------------|
| L2006AW-03-C0KA2-P-19 |                 |
| PART No.              | SPECIAL CODE:   |
| No.FOR CIRCUITS:      | 19=7.0*5.40*2.5 |
| 03                    | PACKAGING:      |
| PLASTIC MATERIAL:     | P=PE            |
| COK=PA6T(BLACK)       | Metal code:     |
|                       | 2=Brass         |
|                       | PLATING:        |
|                       | A= Sn           |

|                                                                                       |       |              |     |                                        |  |
|---------------------------------------------------------------------------------------|-------|--------------|-----|----------------------------------------|--|
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD.                                   |       |              |     | TITLE:<br>2.00mmpitch 90°Wafe dip type |  |
| GENERAL                                                                               |       | TOLERANCE    |     | USE:<br>CUSTOMER                       |  |
| X.                                                                                    | ±0.50 | X.           | ±5° | PART NO.:<br>L2006AW-03-C0KA2-P-19     |  |
| X.X                                                                                   | ±0.30 | X.X          | ±2° | APPD:<br>Zhuzhigang                    |  |
| X.XX                                                                                  | ±0.20 | X.XX         | ±1° | CHKD:<br>Yanpeng                       |  |
|  |       | UNITS:<br>mm |     | DR:<br>Jiangjianyin                    |  |
|                                                                                       |       |              |     | SCALE<br>1 : 1                         |  |
|                                                                                       |       |              |     | SHEET<br>1 / 1                         |  |

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A0  |         | Release     | 蒋建银    | 2020.09.22 |
|     |         |             |        |            |

| No.of Pin/Row | Dimension |      |
|---------------|-----------|------|
| A             | B         |      |
| 202           | 2.0       | 4.0  |
| 203           | 4.0       | 6.0  |
| 204           | 6.0       | 8.0  |
| 205           | 8.0       | 10.0 |
| 206           | 10.0      | 12.0 |
| 207           | 12.0      | 14.0 |
| 208           | 14.0      | 16.0 |
| 209           | 16.0      | 18.0 |
| 210           | 18.0      | 20.0 |
| 211           | 20.0      | 22.0 |
| 212           | 22.0      | 24.0 |
| 213           | 24.0      | 26.0 |
| 214           | 26.0      | 28.0 |
| 215           | 28.0      | 30.0 |
| 216           | 30.0      | 32.0 |
| 217           | 32.0      | 34.0 |
| 218           | 34.0      | 36.0 |
| 219           | 36.0      | 38.0 |
| 220           | 38.0      | 40.0 |
| 221           | 40.0      | 42.0 |
| 222           | 42.0      | 44.0 |
| 223           | 44.0      | 46.0 |
| 224           | 46.0      | 48.0 |
| 225           | 48.0      | 50.0 |
| 226           | 50.0      | 52.0 |
| 227           | 52.0      | 54.0 |
| 228           | 54.0      | 56.0 |
| 229           | 56.0      | 58.0 |
| 230           | 58.0      | 60.0 |
| 231           | 60.0      | 62.0 |
| 232           | 62.0      | 64.0 |
| 233           | 64.0      | 66.0 |
| 234           | 66.0      | 68.0 |
| 235           | 68.0      | 70.0 |
| 236           | 70.0      | 72.0 |
| 237           | 72.0      | 74.0 |
| 238           | 74.0      | 76.0 |
| 239           | 76.0      | 78.0 |
| 240           | 78.0      | 80.0 |

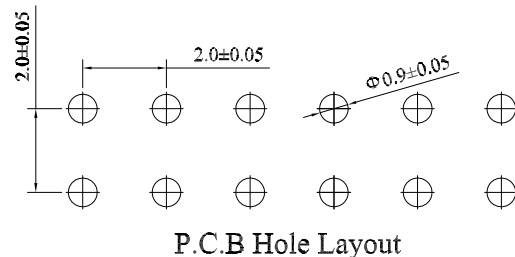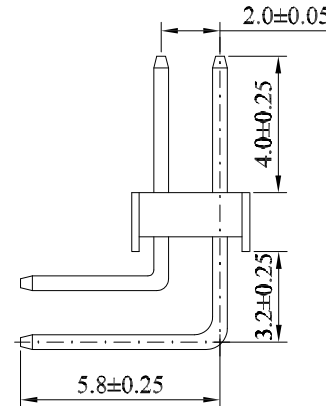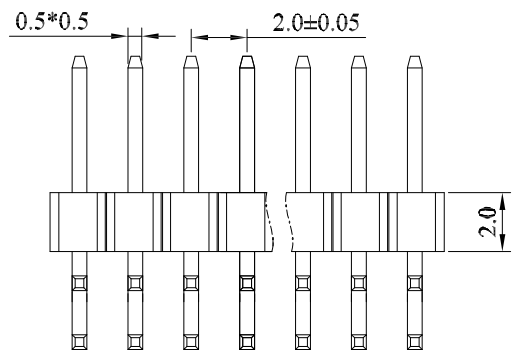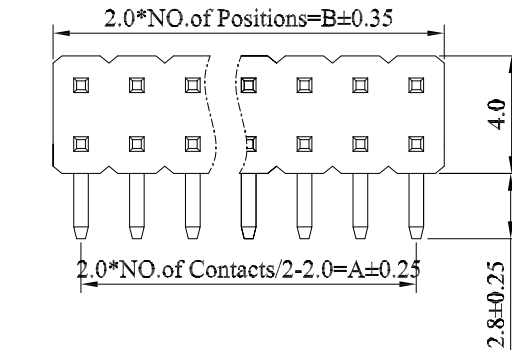

### 主要技术参数 Main Specifications

线 数 (Poles): 02 to 80

接触电阻 (Contact resistance):  $\leq 20m\Omega$

绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 2.0A AC DC


耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range):  $-40^{\circ}C \sim +105^{\circ}C$


### ORDER INFORMATION:

|                        |  |                    |  |
|------------------------|--|--------------------|--|
| L2006AW-2**-C1KC2-P-11 |  | SPECIAL CODE:      |  |
| PART No.               |  | 11=弯针双排4.0*3.2*5.8 |  |
| No. FOR CIRCUITS:      |  | PACKAGING:         |  |
| 2                      |  | P=PE               |  |
| PLASTIC MATERIAL:      |  | Metal material:    |  |
| C1K=PA6T (Black)       |  | 2=Brass            |  |
|                        |  | PLATING:           |  |
|                        |  | C=GOLD FLASH       |  |

| C                                                   |           |        |          |                       |
|-----------------------------------------------------|-----------|--------|----------|-----------------------|
| B                                                   | CONTACT   | n PCS  | Brass    | GOLD FLASH            |
| A                                                   | HOUSING   | 1 PCS  | PA6T     | UL 94V-0, COLOR:Black |
| ITEM                                                | COMPONENT | Q'TY   | MATERIAL | FINISH                |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |        |          | TITLE: -<br>-         |
| X.±0.5                                              | X.±5'     | USE:   | CUSTOMER |                       |
| .X±0.3                                              | .X±2'     | APPD:  | 王亮       |                       |
| .XX±0.25                                            | .XX±1'    | CHKD:  | 刘振岭      |                       |
| --                                                  | --        | DR:    | 蒋建银      |                       |
| ⊕                                                   | ⊕         | UNITS: | mm       | SCALE<br>1 : 1        |
|                                                     |           |        |          | SHEET<br>1 / 1        |

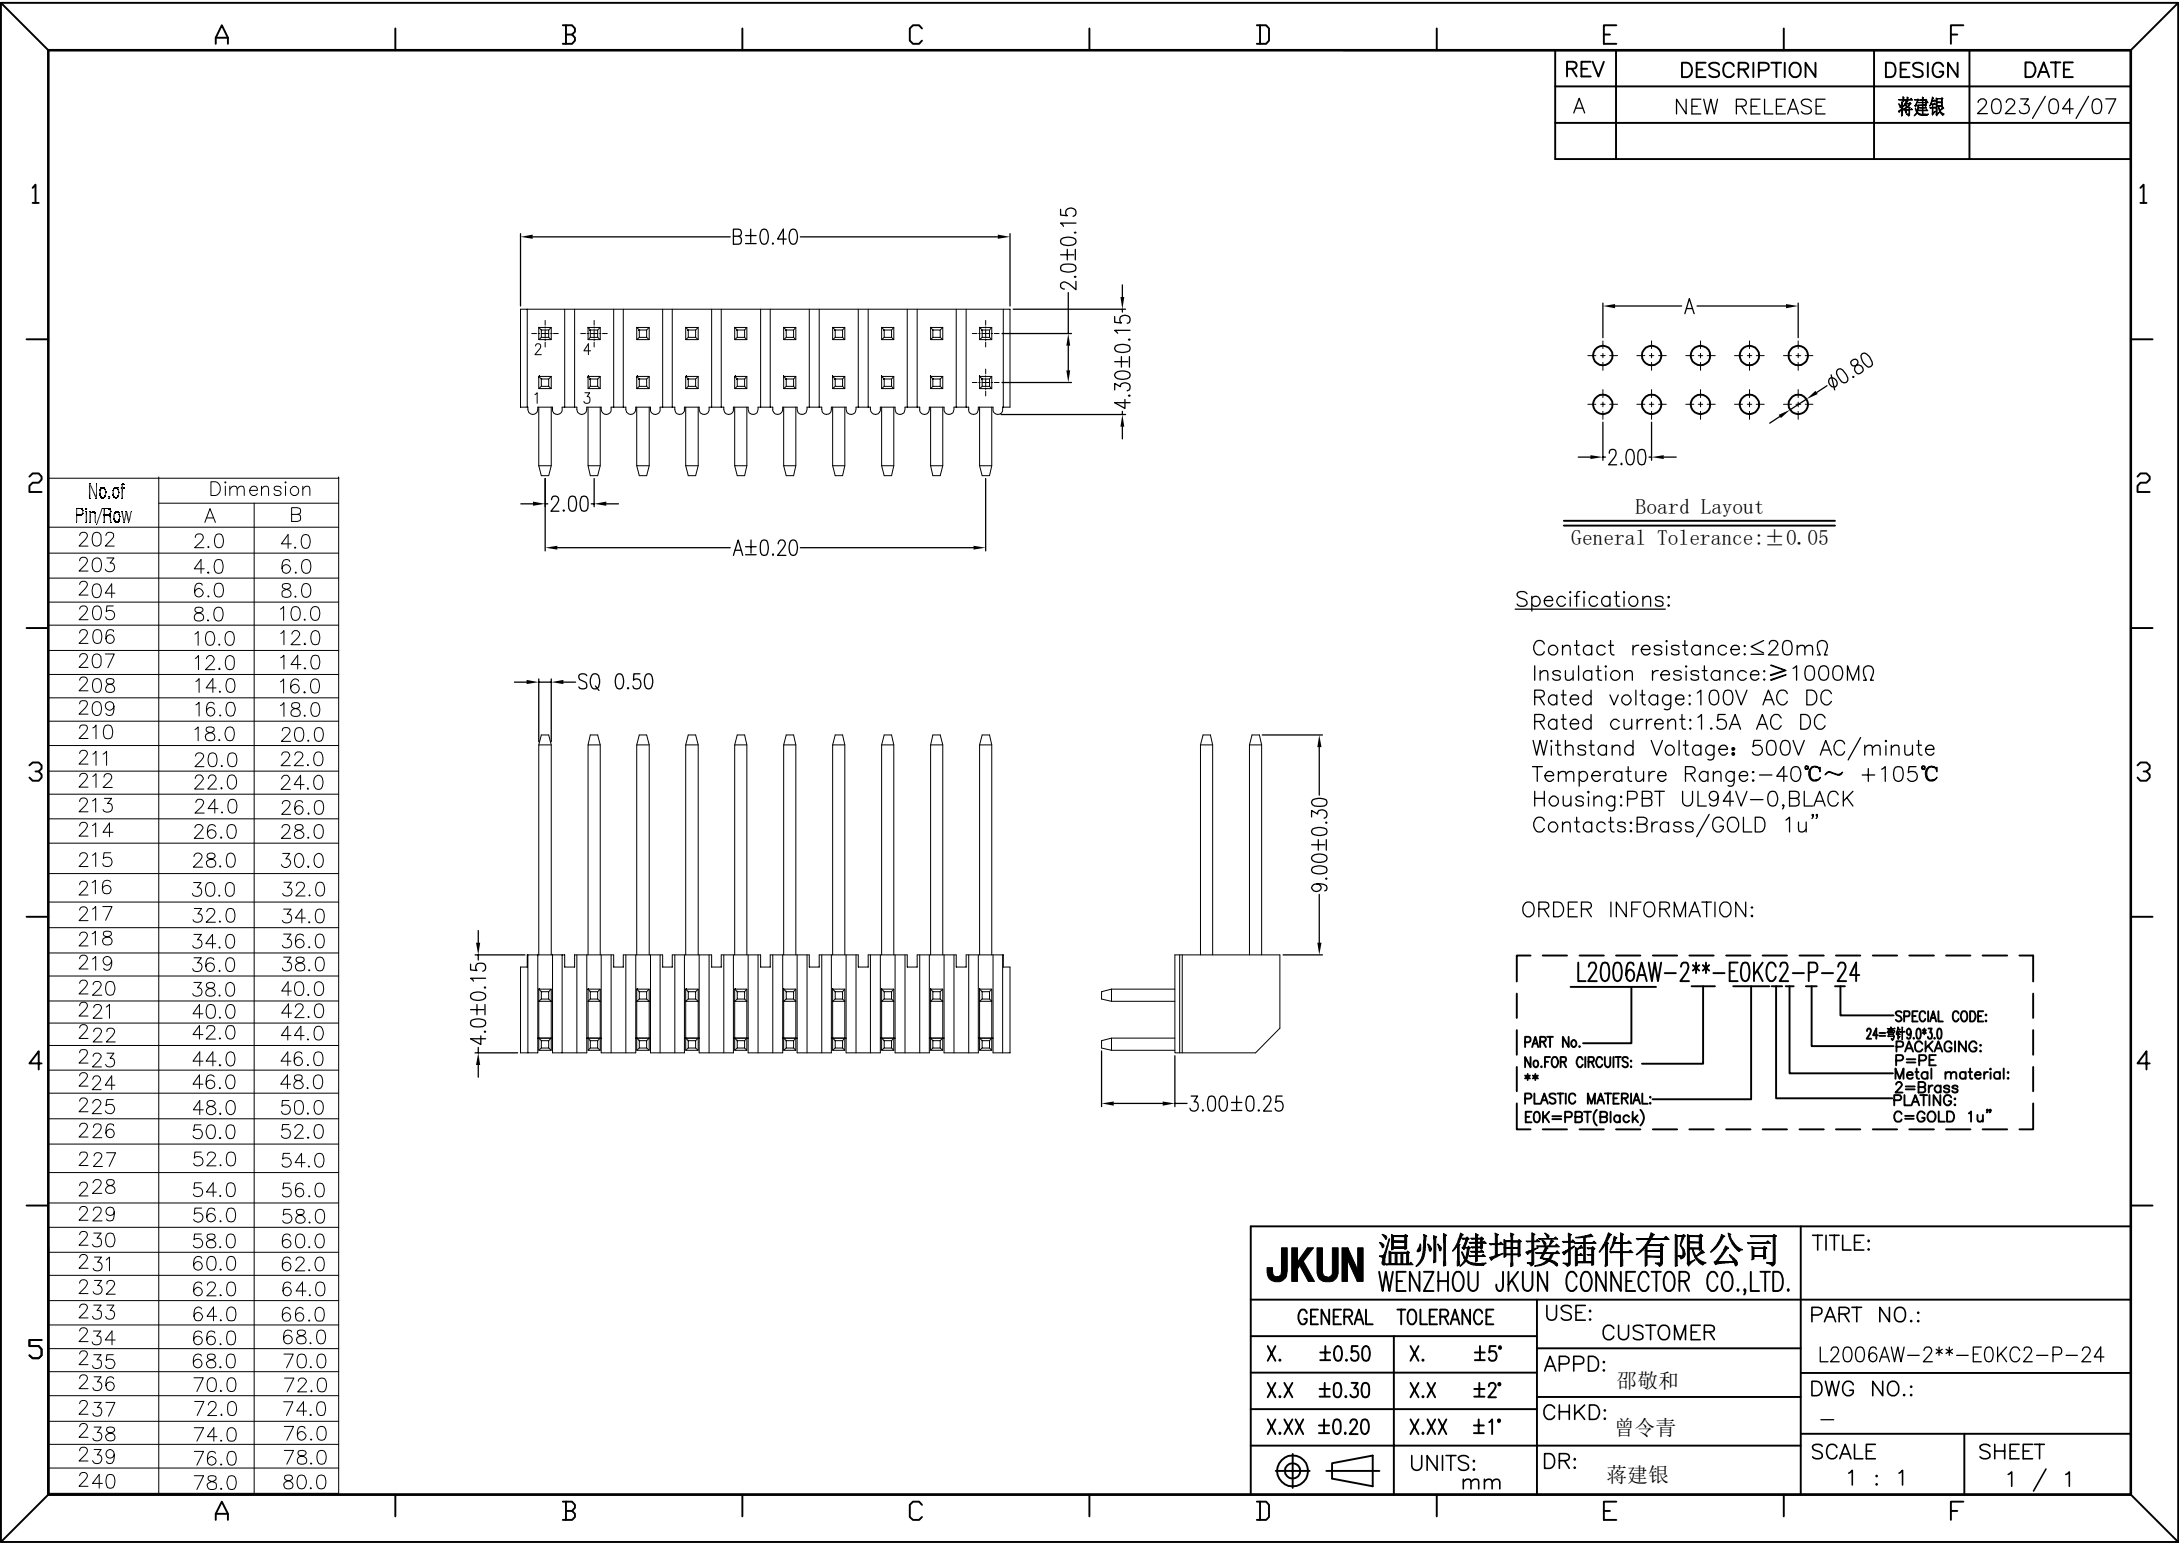

| REV | DESCRIPTION | DESIGN | DATE       |
|-----|-------------|--------|------------|
| A   | NEW RELEASE | 蒋建银    | 2023/04/07 |
|     |             |        |            |




Board Layout  
General Tolerance: ±0.05


Specifications:


Contact resistance: ≤20mΩ  
Insulation resistance: ≥1000MΩ  
Rated voltage: 100V AC DC  
Rated current: 1.5A AC DC  
Withstand Voltage: 500V AC/minute  
Temperature Range: -40℃ ~ +105℃  
Housing: PBT UL94V-0, BLACK  
Contacts: Brass/GOLD 1u"

ORDER INFORMATION:






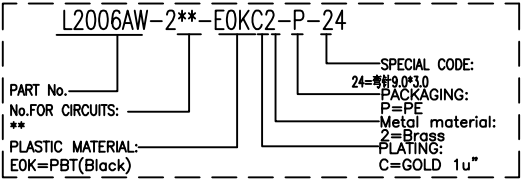


|                                                     |          |           |  |                        |       |
|-----------------------------------------------------|----------|-----------|--|------------------------|-------|
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |          |           |  | TITLE:                 |       |
| GENERAL TOLERANCE                                   |          | USE:      |  | PART NO.:              |       |
| X. ±0.50                                            | X. ±5'   | CUSTOMER  |  | L2006AW-2**-E0KC2-P-24 |       |
| X.X ±0.30                                           | X.X ±2'  | APPD: 邵敬和 |  | DWG NO.:               |       |
| X.XX ±0.20                                          | X.XX ±1' | CHKD: 曾令青 |  | -                      |       |
| UNITS: mm                                           |          | DR: 蒋建银   |  | SCALE                  | SHEET |
|                                                     |          |           |  | 1 : 1                  | 1 / 1 |

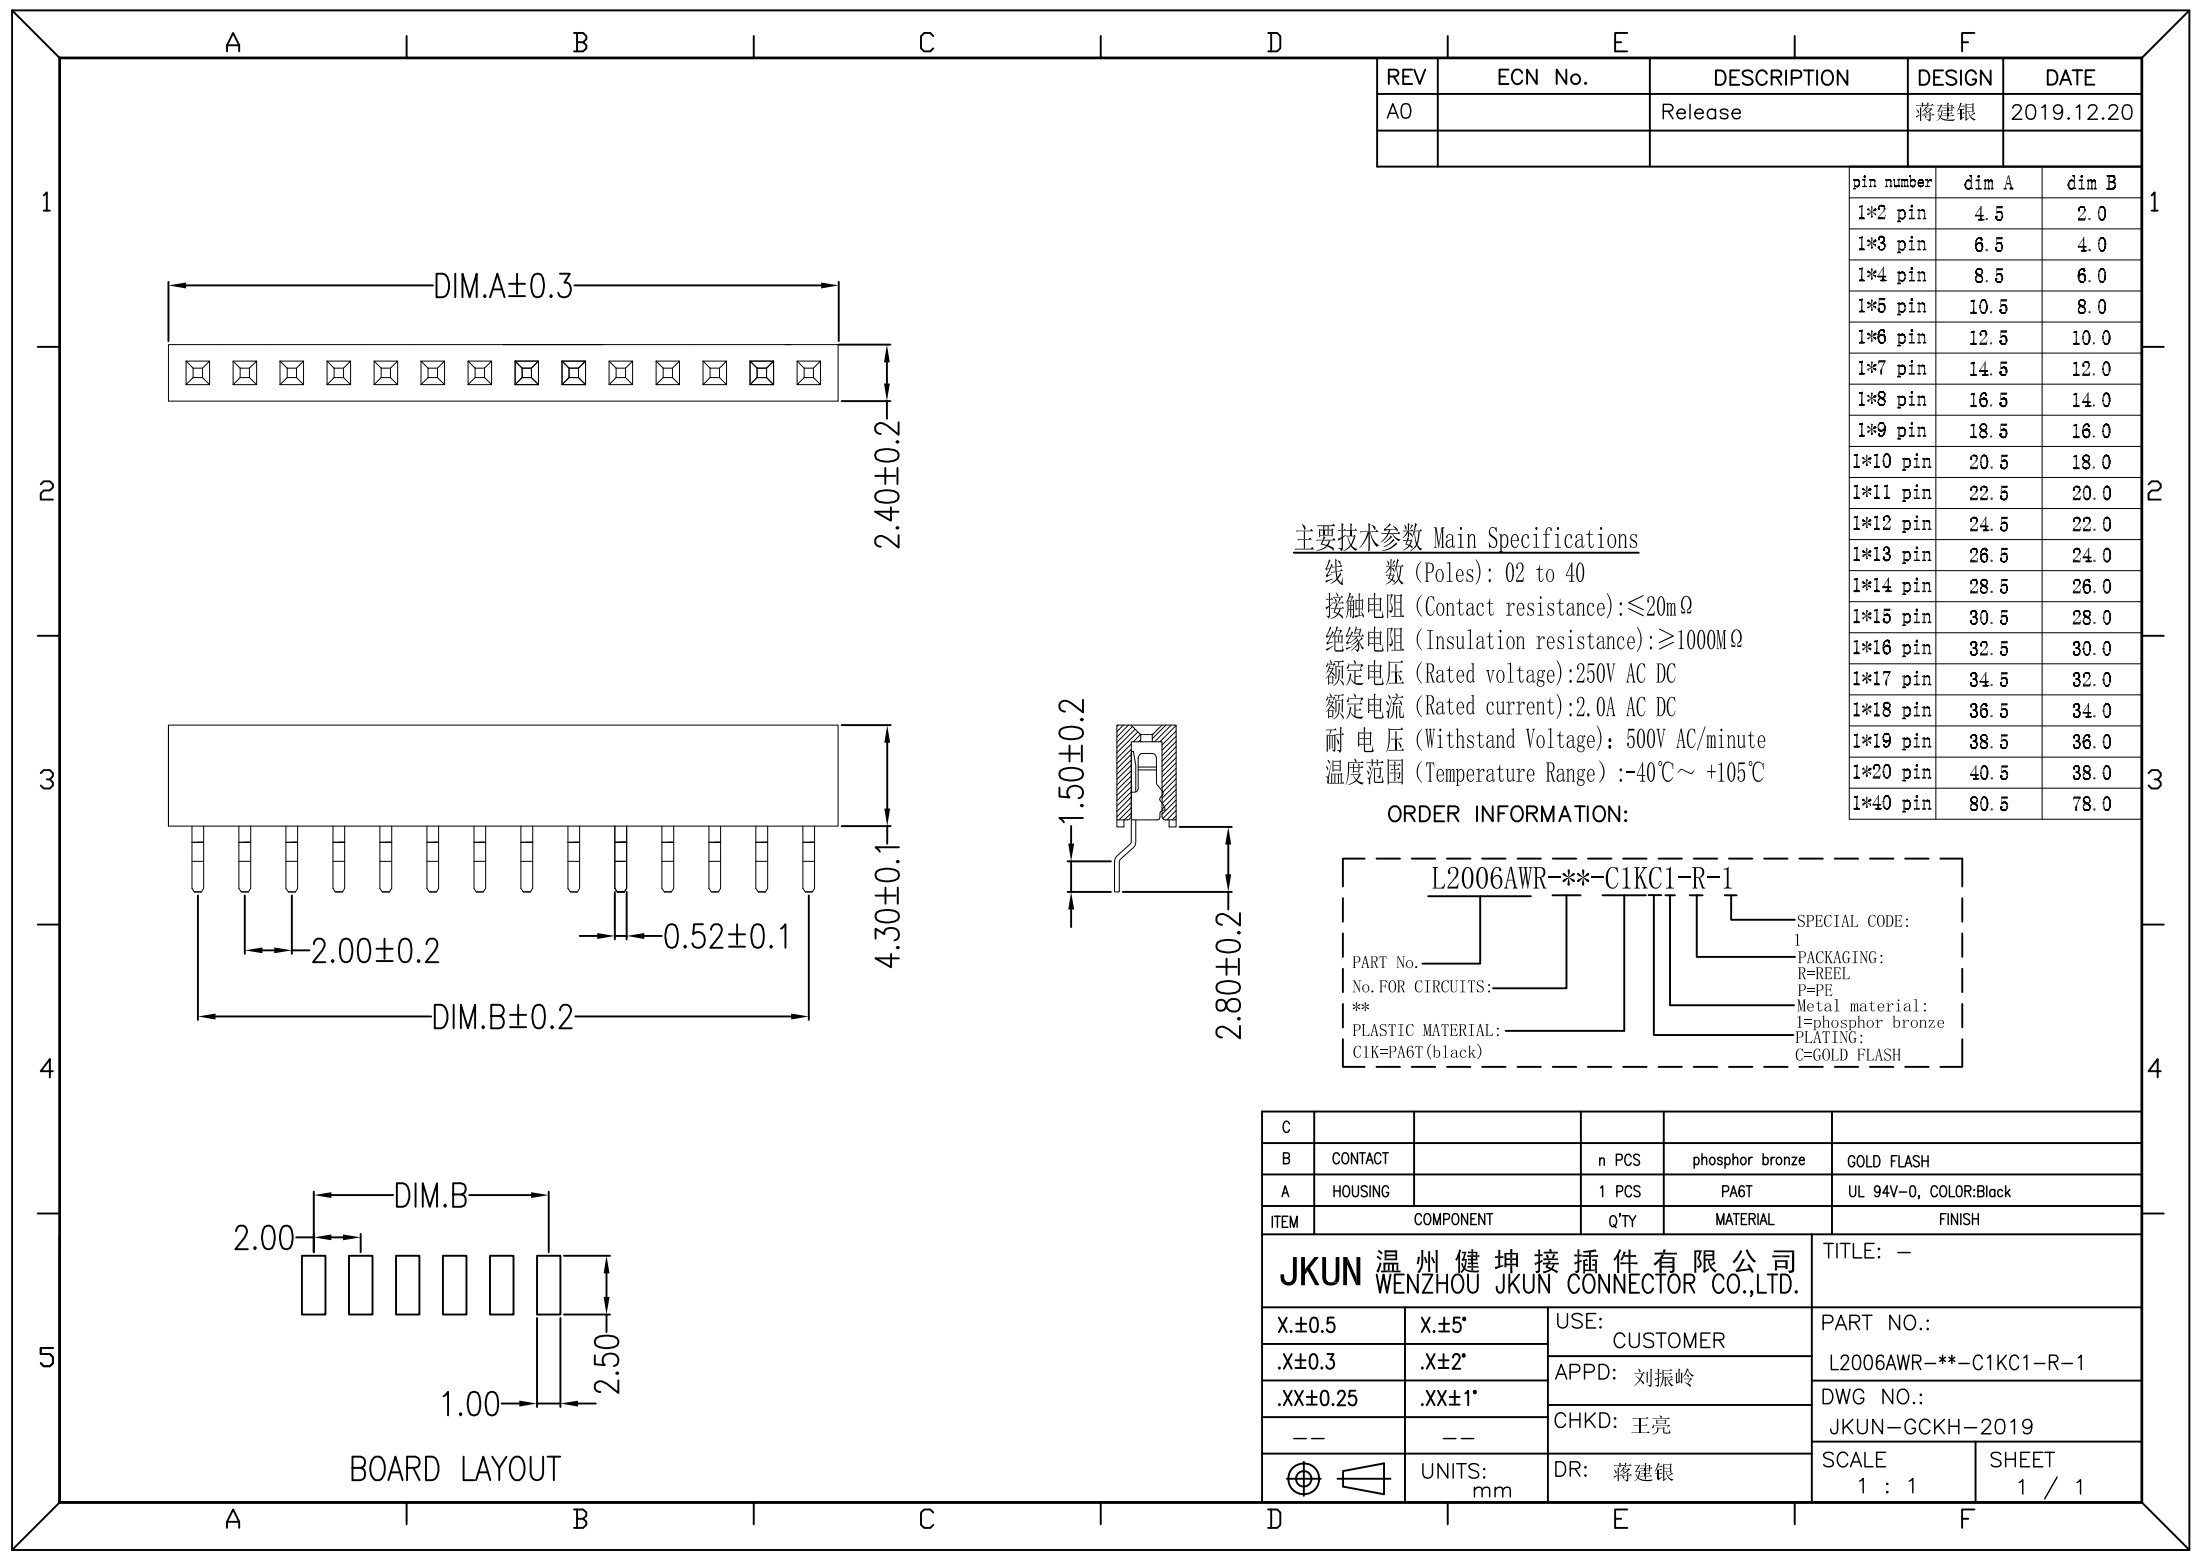

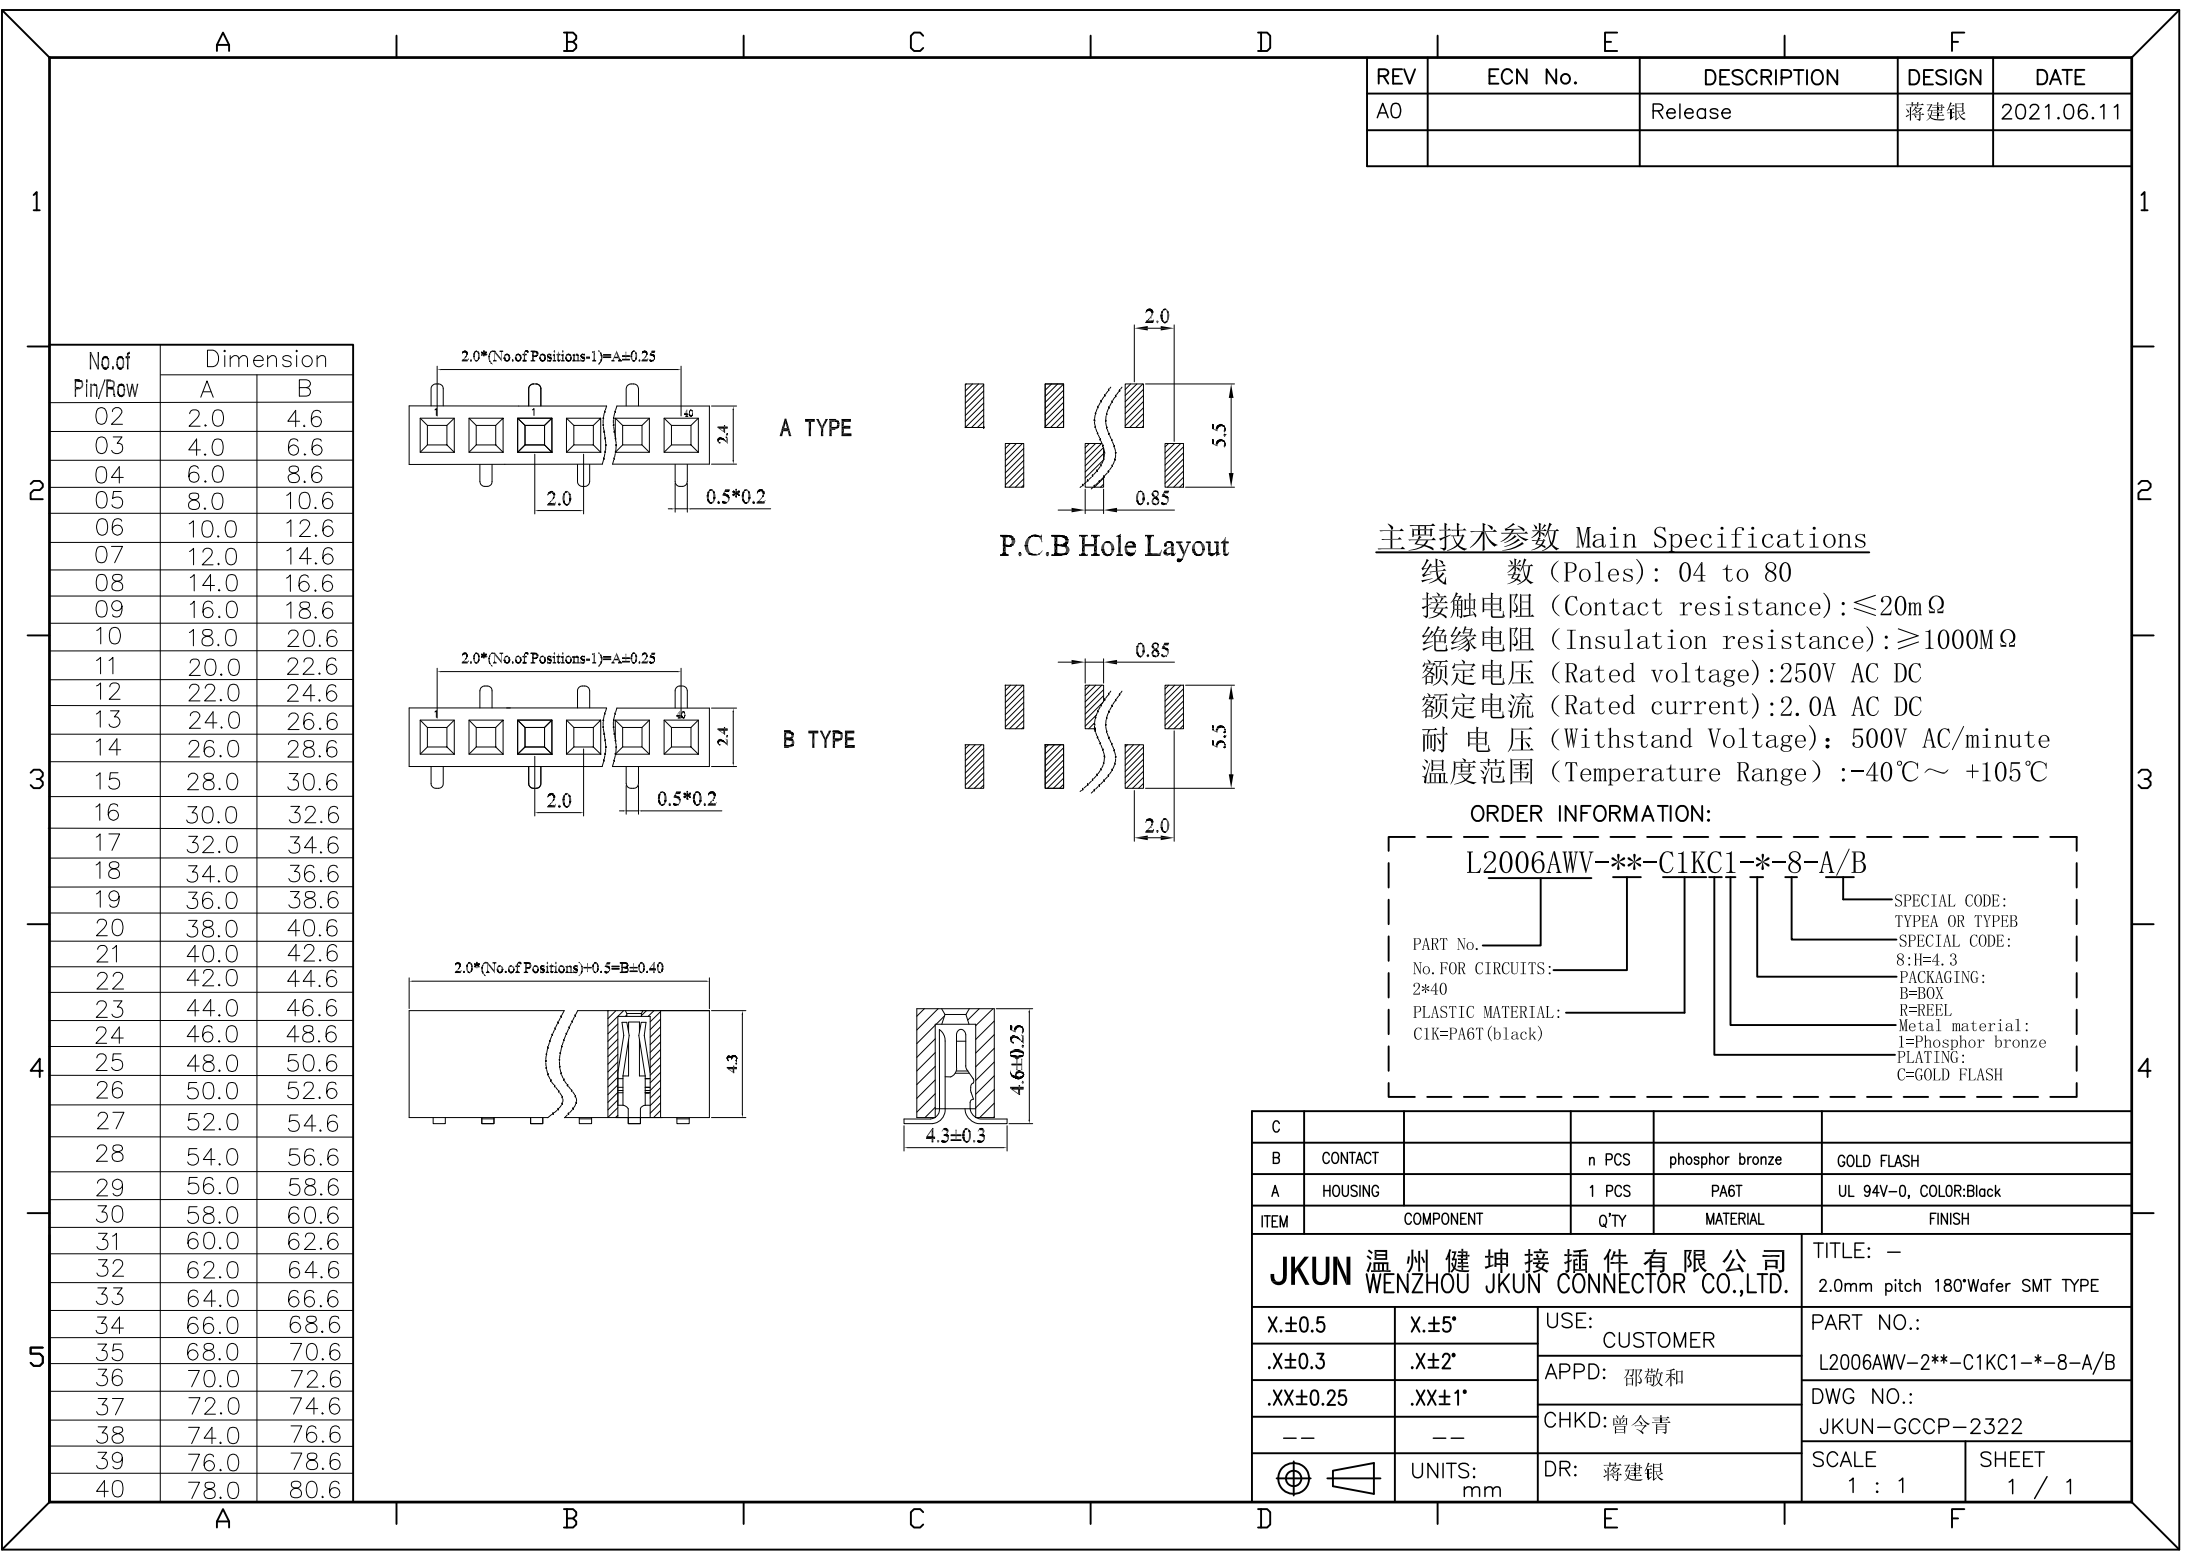

|   | No. of Pin/Row | Dimension |      |
|---|----------------|-----------|------|
|   |                | A         | B    |
| 1 | 02             | 2.0       | 4.6  |
|   | 03             | 4.0       | 6.6  |
|   | 04             | 6.0       | 8.6  |
|   | 05             | 8.0       | 10.6 |
|   | 06             | 10.0      | 12.6 |
|   | 07             | 12.0      | 14.6 |
|   | 08             | 14.0      | 16.6 |
|   | 09             | 16.0      | 18.6 |
|   | 10             | 18.0      | 20.6 |
|   | 11             | 20.0      | 22.6 |
| 2 | 12             | 22.0      | 24.6 |
|   | 13             | 24.0      | 26.6 |
|   | 14             | 26.0      | 28.6 |
|   | 15             | 28.0      | 30.6 |
|   | 16             | 30.0      | 32.6 |
|   | 17             | 32.0      | 34.6 |
|   | 18             | 34.0      | 36.6 |
|   | 19             | 36.0      | 38.6 |
|   | 20             | 38.0      | 40.6 |
|   | 21             | 40.0      | 42.6 |
| 3 | 22             | 42.0      | 44.6 |
|   | 23             | 44.0      | 46.6 |
|   | 24             | 46.0      | 48.6 |
|   | 25             | 48.0      | 50.6 |
|   | 26             | 50.0      | 52.6 |
|   | 27             | 52.0      | 54.6 |
|   | 28             | 54.0      | 56.6 |
|   | 29             | 56.0      | 58.6 |
|   | 30             | 58.0      | 60.6 |
|   | 31             | 60.0      | 62.6 |
| 4 | 32             | 62.0      | 64.6 |
|   | 33             | 64.0      | 66.6 |
|   | 34             | 66.0      | 68.6 |
|   | 35             | 68.0      | 70.6 |
|   | 36             | 70.0      | 72.6 |
|   | 37             | 72.0      | 74.6 |
|   | 38             | 74.0      | 76.6 |
|   | 39             | 76.0      | 78.6 |
|   | 40             | 78.0      | 80.6 |

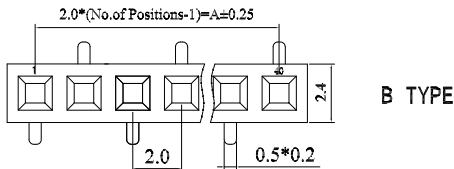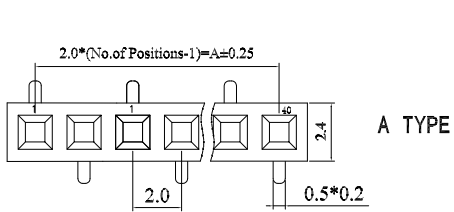

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A0  |         | Release     | 蒋建银    | 2021.06.11 |

### 主要技术参数 Main Specifications

线 数 (Poles): 04 to 80

接触电阻 (Contact resistance):  $\leq 20m\Omega$

绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$


额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 2.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute




温度范围 (Temperature Range):  $-40^{\circ}C \sim +105^{\circ}C$

### ORDER INFORMATION:

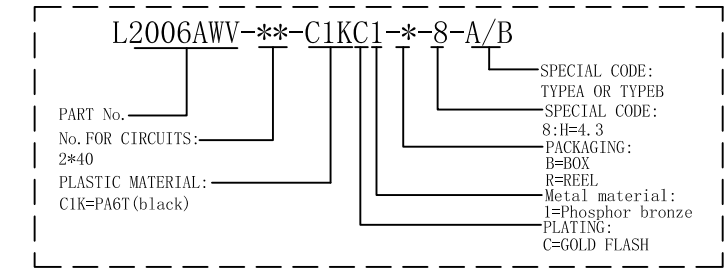

|                                                     |              |                  |                            |                 |                                            |
|-----------------------------------------------------|--------------|------------------|----------------------------|-----------------|--------------------------------------------|
| C                                                   |              |                  |                            |                 |                                            |
| B                                                   | CONTACT      |                  | n PCS                      | phosphor bronze | GOLD FLASH                                 |
| A                                                   | HOUSING      |                  | 1 PCS                      | PA6T            | UL 94V-0, COLOR:Black                      |
| ITEM                                                | COMPONENT    |                  | Q'TY                       | MATERIAL        | FINISH                                     |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |              |                  |                            |                 | TITLE: -<br>2.0mm pitch 180°Wafer SMT TYPE |
| X $\pm$ 0.5                                         | X $\pm$ 5°   | USE:<br>CUSTOMER | PART NO.:                  |                 |                                            |
| X $\pm$ 0.3                                         | X $\pm$ 2°   |                  | L2006AWV-2**-C1KC1-*-8-A/B |                 |                                            |
| .XX $\pm$ 0.25                                      | .XX $\pm$ 1° |                  | DWG NO.:                   |                 |                                            |
| --                                                  | --           | CHKD: 曾令青        | JKUN-GCCP-2322             |                 |                                            |
|                                                     | UNITS: mm    | DR: 蒋建银          | SCALE                      |                 | SHEET                                      |
|                                                     |              |                  | 1 : 1                      |                 | 1 / 1                                      |

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| AO  |         | Release     | 蒋建银    | 2020.09.01 |
|     |         |             |        |            |

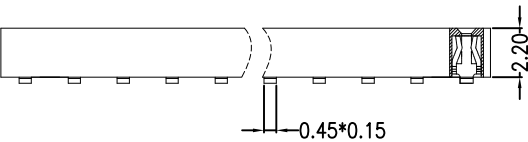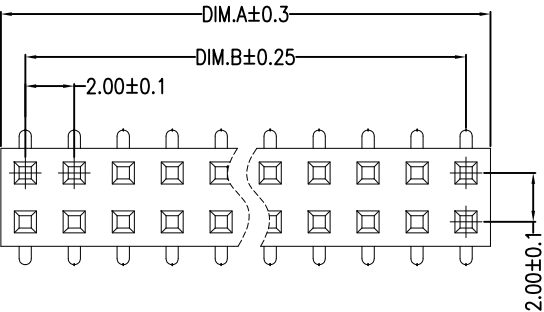


主要技术参数 Main Specifications

线 数 (Poles): 04 to 80  
接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$   
绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$   
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range):  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:


|                         |  |                   |  |
|-------------------------|--|-------------------|--|
| L2006AWV-2**-C1KC1-*--7 |  | SPECIAL CODE:     |  |
| PART No.                |  | 7:H=2.2           |  |
| No. FOR CIRCUITS:       |  | PACKAGING:        |  |
| 2*12                    |  | B=BOX             |  |
| PLASTIC MATERIAL:       |  | R=REEL            |  |
| C1K=PA6T (black)        |  | Metal material:   |  |
|                         |  | 1=Phosphor bronze |  |
|                         |  | PLATING:          |  |
|                         |  | C=GOLD FLASH      |  |

| pin number | Dim A | Dim B |
|------------|-------|-------|
| 2*2 pin    | 4.3   | 2.0   |
| 2*3 pin    | 6.3   | 4.0   |
| 2*4 pin    | 8.3   | 6.0   |
| 2*5 pin    | 10.3  | 8.0   |
| 2*6 pin    | 12.3  | 10.0  |
| 2*7 pin    | 14.3  | 12.0  |
| 2*8 pin    | 16.3  | 14.0  |
| 2*9 pin    | 18.3  | 16.0  |
| 2*10 pin   | 20.3  | 18.0  |
| 2*11 pin   | 22.3  | 20.0  |
| 2*12 pin   | 24.3  | 22.0  |
| 2*13 pin   | 26.3  | 24.0  |
| 2*14 pin   | 28.3  | 26.0  |
| 2*15 pin   | 30.3  | 28.0  |
| 2*16 pin   | 32.3  | 30.0  |
| 2*17 pin   | 34.3  | 32.0  |
| 2*18 pin   | 36.3  | 34.0  |
| 2*19 pin   | 38.3  | 36.0  |
| ~          | ~     | ~     |
| 2*40 pin   | 80.3  | 78.0  |

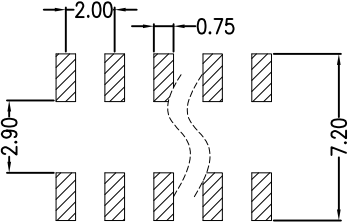

P.C.B Hole Layout

|                                                     |           |               |          |                                            |
|-----------------------------------------------------|-----------|---------------|----------|--------------------------------------------|
| C                                                   |           |               |          |                                            |
| B                                                   | CONTACT   |               | n PCS    | phosphor bronze                            |
| A                                                   | HOUSING   |               | 1 PCS    | PA6T                                       |
| ITEM                                                | COMPONENT | Q'TY          | MATERIAL | FINISH                                     |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |               |          | TITLE: -<br>2.0mm pitch 180°Wafer SMT TYPE |
| X.±0.5                                              | X.±5'     | USE: CUSTOMER |          | PART NO.:<br>L2006AWV-2**-C1KC1-*--7       |
| .X±0.3                                              | .X±2'     | APPD: 邵敬和     |          | DWG NO.:<br>JKUN-GCCP-2174                 |
| .XX±0.25                                            | .XX±1'    | CHKD: 曾令青     |          | SCALE<br>1 : 1                             |
| --                                                  | --        | DR: 蒋建银       |          | SHEET<br>1 / 1                             |
|                                                     | UNITS: mm |               |          |                                            |

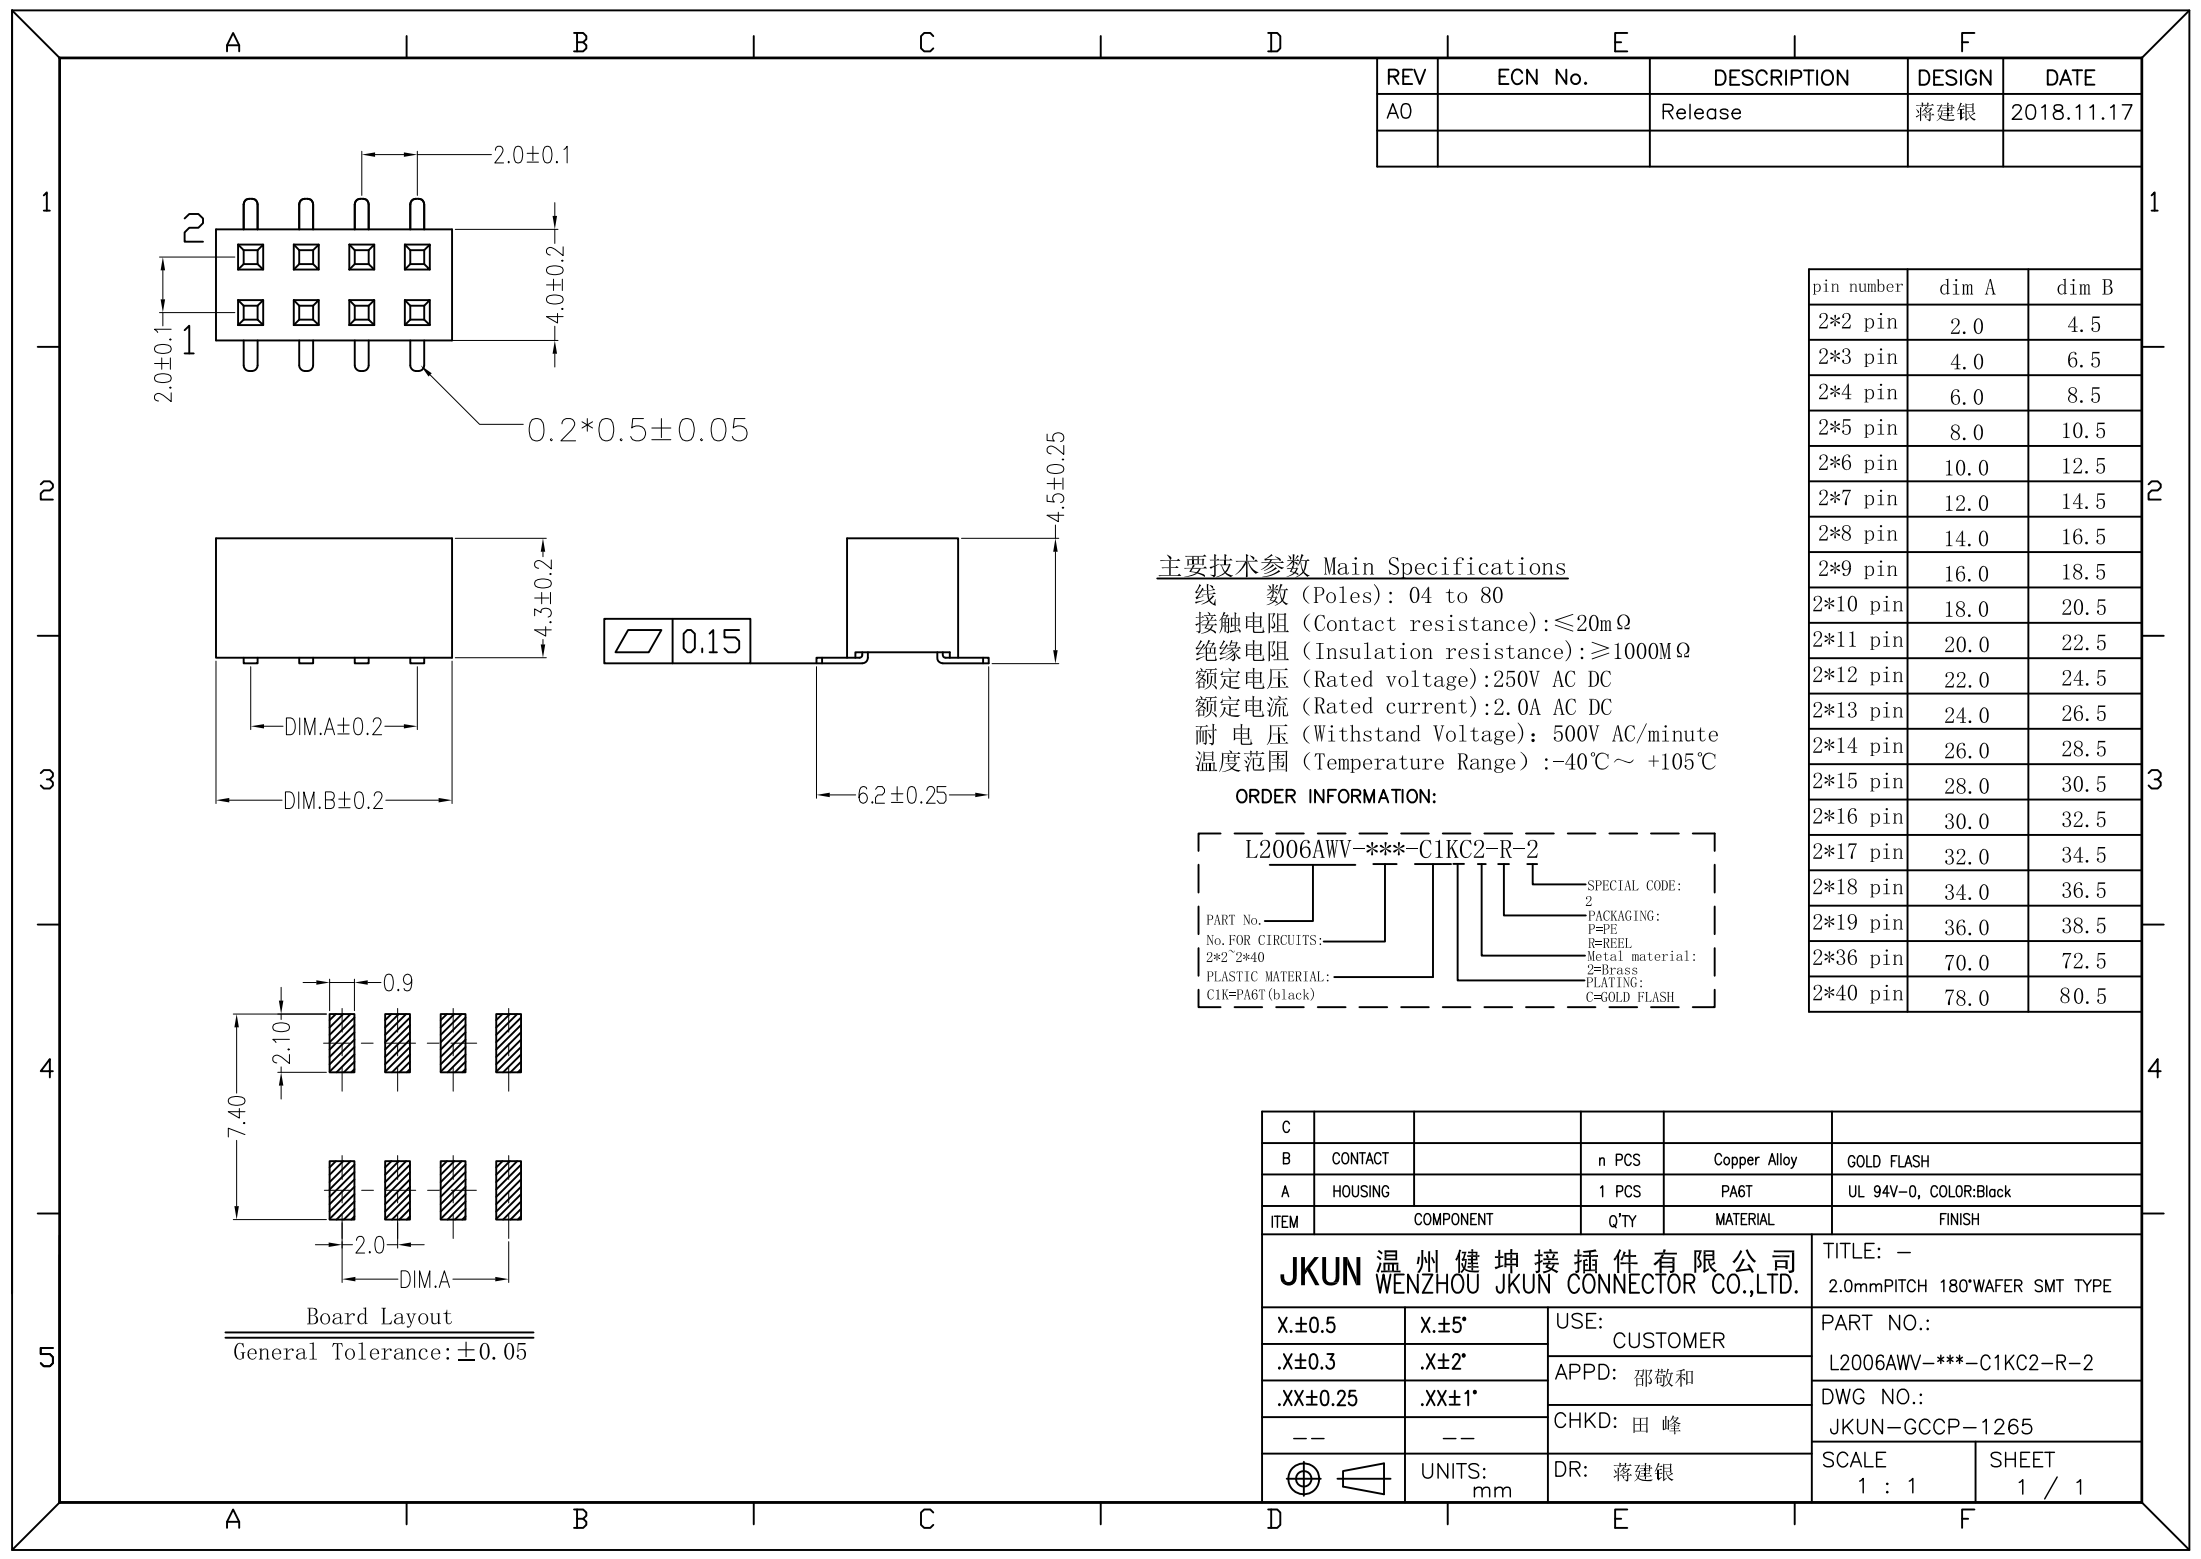

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A0  |         | Release     | 蒋建银    | 2018.11.17 |
|     |         |             |        |            |

| pin number | dim A | dim B |
|------------|-------|-------|
| 2*2 pin    | 2.0   | 4.5   |
| 2*3 pin    | 4.0   | 6.5   |
| 2*4 pin    | 6.0   | 8.5   |
| 2*5 pin    | 8.0   | 10.5  |
| 2*6 pin    | 10.0  | 12.5  |
| 2*7 pin    | 12.0  | 14.5  |
| 2*8 pin    | 14.0  | 16.5  |
| 2*9 pin    | 16.0  | 18.5  |
| 2*10 pin   | 18.0  | 20.5  |
| 2*11 pin   | 20.0  | 22.5  |
| 2*12 pin   | 22.0  | 24.5  |
| 2*13 pin   | 24.0  | 26.5  |
| 2*14 pin   | 26.0  | 28.5  |
| 2*15 pin   | 28.0  | 30.5  |
| 2*16 pin   | 30.0  | 32.5  |
| 2*17 pin   | 32.0  | 34.5  |
| 2*18 pin   | 34.0  | 36.5  |
| 2*19 pin   | 36.0  | 38.5  |
| 2*36 pin   | 70.0  | 72.5  |
| 2*40 pin   | 78.0  | 80.5  |

主要技术参数 Main Specifications

线 数 (Poles): 04 to 80  
接触电阻 (Contact resistance): ≤20mΩ  
绝缘电阻 (Insulation resistance): ≥1000MΩ  
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range): -40℃ ~ +105℃





ORDER INFORMATION:

|                        |                 |
|------------------------|-----------------|
| L2006AWV-***-C1KC2-R-2 |                 |
| PART No.               | SPECIAL CODE:   |
| No. FOR CIRCUITS:      | 2               |
| 2*2~2*40               | PACKAGING:      |
| PLASTIC MATERIAL:      | P=PE            |
| C1K=PA6T (black)       | R=REEL          |
|                        | Metal material: |
|                        | 2=Brass         |
|                        | PLATING:        |
|                        | C=GOLD FLASH    |

|                                                     |           |           |          |                        |                                           |
|-----------------------------------------------------|-----------|-----------|----------|------------------------|-------------------------------------------|
| C                                                   |           |           |          |                        |                                           |
| B                                                   | CONTACT   |           | n PCS    | Copper Alloy           | GOLD FLASH                                |
| A                                                   | HOUSING   |           | 1 PCS    | PA6T                   | UL 94V-0, COLOR:Black                     |
| ITEM                                                | COMPONENT | Q'TY      | MATERIAL | FINISH                 |                                           |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |           |          |                        | TITLE: -<br>2.0mmPITCH 180°WAFER SMT TYPE |
| X.±0.5                                              | X.±5°     | USE:      |          | PART NO.:              |                                           |
| .X±0.3                                              | .X±2°     | CUSTOMER  |          | L2006AWV-***-C1KC2-R-2 |                                           |
| .XX±0.25                                            | .XX±1°    | APPD: 邵敬和 |          | DWG NO.:               |                                           |
| --                                                  | --        | CHKD: 田 峰 |          | JKUN-GCCP-1265         |                                           |
| ⊕                                                   | ⊖         | UNITS: mm |          | SCALE                  | SHEET                                     |
|                                                     |           | DR: 蒋建银   |          | 1 : 1                  | 1 / 1                                     |

A B C D

| E   |         | F           |        |            |
|-----|---------|-------------|--------|------------|
| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
| AO  |         | Release     | 蒋建银    | 2018.11.17 |
|     |         |             |        |            |

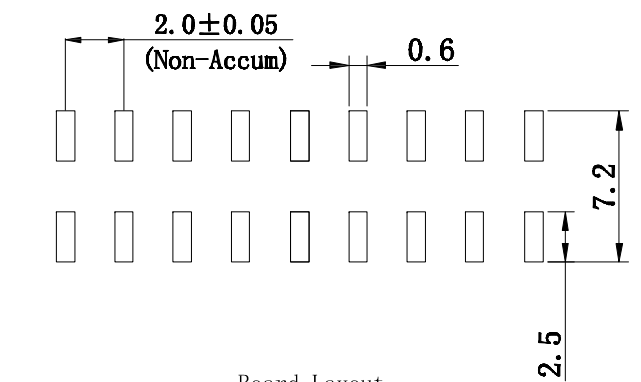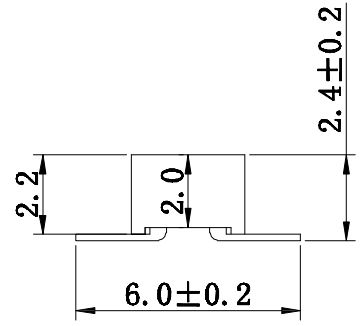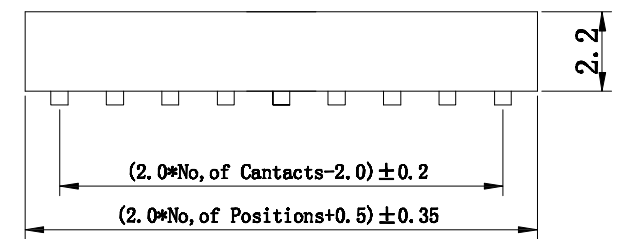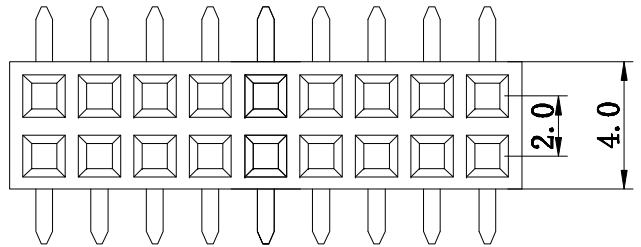


Board Layout  
General Tolerance: ±0.05

主要技术参数 Main Specifications


线 数 (Poles): 04 to 80  
接触电阻 (Contact resistance): ≤20mΩ  
绝缘电阻 (Insulation resistance): ≥1000MΩ  
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range) : -40℃ ~ +105℃

ORDER INFORMATION:

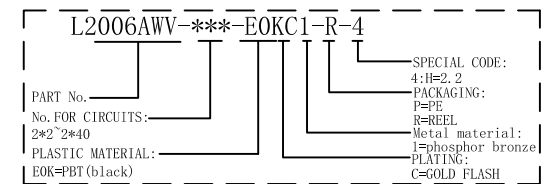

|                                                     |           |               |          |                                           |
|-----------------------------------------------------|-----------|---------------|----------|-------------------------------------------|
| C                                                   |           |               |          |                                           |
| B                                                   | CONTACT   |               | n PCS    | phosphor bronze                           |
| A                                                   | HOUSING   |               | 1 PCS    | PBT                                       |
| ITEM                                                | COMPONENT | Q'TY          | MATERIAL | FINISH                                    |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |               |          | TITLE: -<br>2.0mmPITCH 180°WAFER SMT TYPE |
| X.±0.5                                              | X.±5°     | USE: CUSTOMER |          | PART NO.:<br>L2006AWV-***-E0KC1-R-4       |
| .X±0.3                                              | .X±2°     | APPD: 邵敬和     |          | DWG NO.:<br>JKUN-GCCP-2071                |
| .XX±0.25                                            | .XX±1°    | CHKD: 田 峰     |          | SCALE<br>1 : 1                            |
| --                                                  | --        | DR: 蒋建银       |          | SHEET<br>1 / 1                            |
| UNITS: mm                                           |           |               |          |                                           |

A B C D E F

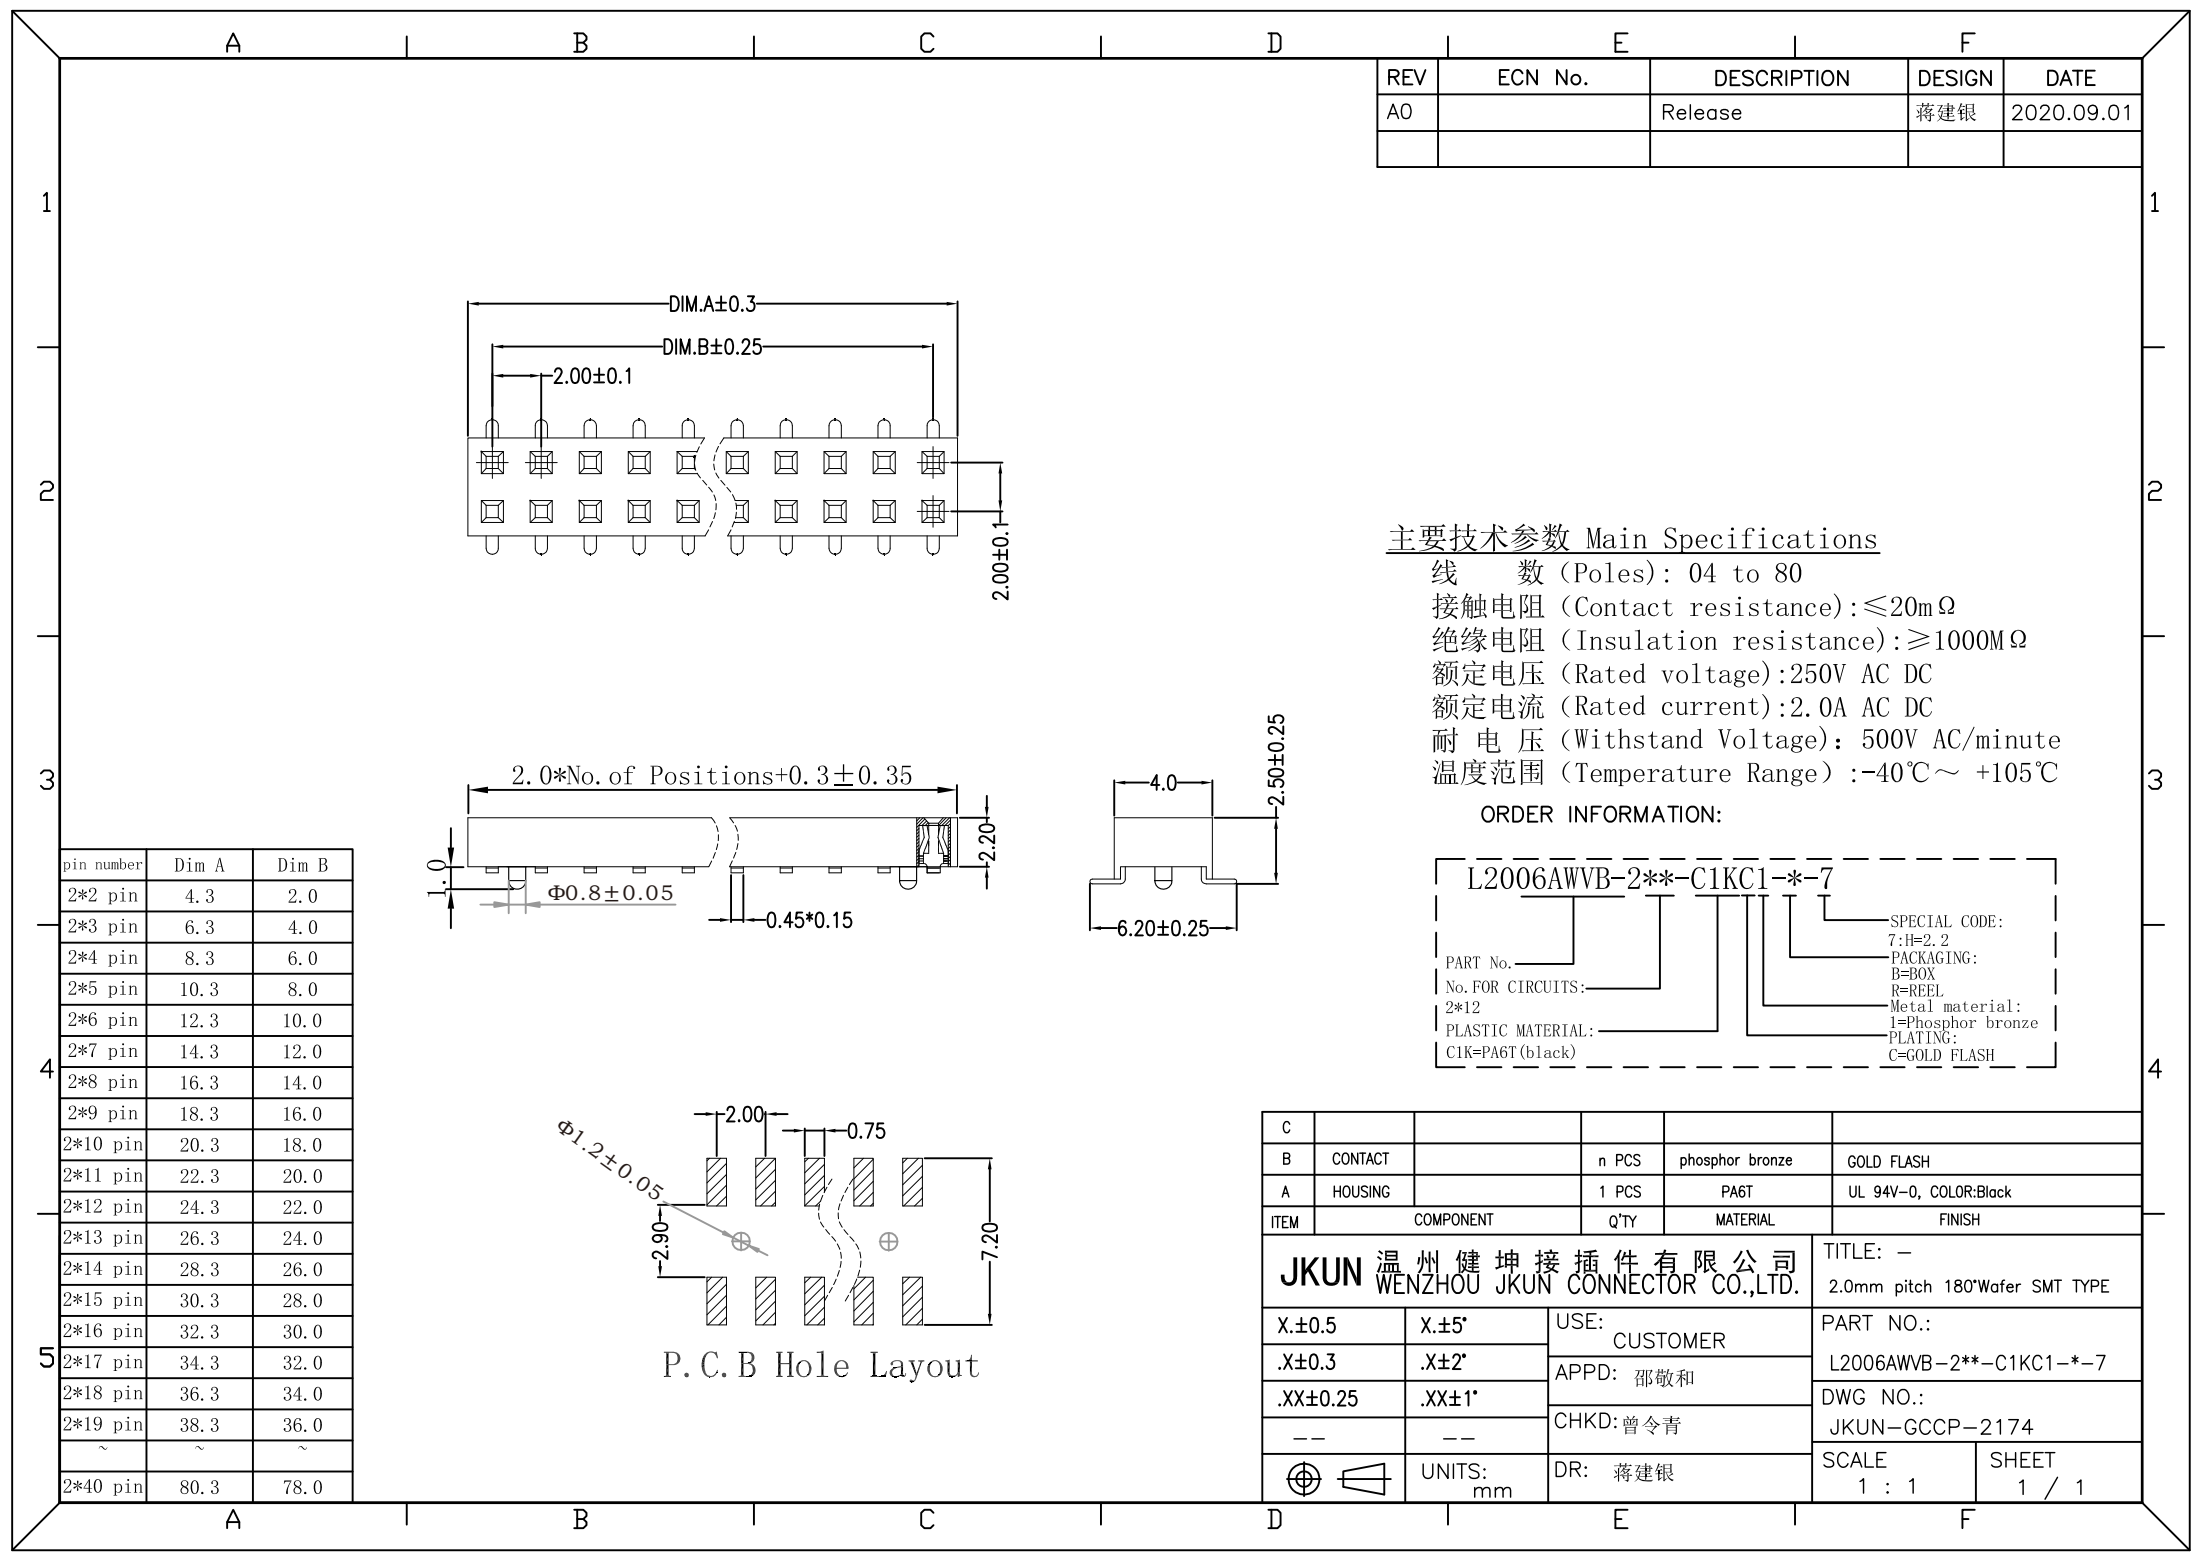

主要技术参数 Main Specifications


线 数 (Poles): 04 to 80  
接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$   
绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$   
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range):  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:


|                         |  |  |                   |
|-------------------------|--|--|-------------------|
| L2006AWVB-2**-C1KC1-*-7 |  |  |                   |
| PART No.                |  |  | SPECIAL CODE:     |
| No. FOR CIRCUITS:       |  |  | 7:H=2.2           |
| 2*12                    |  |  | PACKAGING:        |
| PLASTIC MATERIAL:       |  |  | B=BOX             |
| C1K=PA6T (black)        |  |  | R=REEL            |
|                         |  |  | Metal material:   |
|                         |  |  | 1=Phosphor bronze |
|                         |  |  | PLATING:          |
|                         |  |  | C=GOLD FLASH      |

|                                                     |              |                  |                                      |                                            |
|-----------------------------------------------------|--------------|------------------|--------------------------------------|--------------------------------------------|
| C                                                   |              |                  |                                      |                                            |
| B                                                   | CONTACT      | n PCS            | phosphor bronze                      | GOLD FLASH                                 |
| A                                                   | HOUSING      | 1 PCS            | PA6T                                 | UL 94V-0, COLOR:Black                      |
| ITEM                                                | COMPONENT    | Q'TY             | MATERIAL                             | FINISH                                     |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |              |                  |                                      | TITLE: -<br>2.0mm pitch 180°Wafer SMT TYPE |
| X.±0.5                                              | X.±5'        | USE:<br>CUSTOMER | PART NO.:<br>L2006AWVB-2**-C1KC1-*-7 |                                            |
| .X±0.3                                              | .X±2'        |                  | DWG NO.:<br>JKUN-GCCP-2174           |                                            |
| .XX±0.25                                            | .XX±1'       |                  | SCALE<br>1 : 1                       |                                            |
| --                                                  | --           | CHKD: 曾令青        | SHEET<br>1 / 1                       |                                            |
| ⊕                                                   | UNITS:<br>mm | DR: 蒋建银          |                                      |                                            |

| A  |                  |           |      |
|----|------------------|-----------|------|
| A  | No.of<br>Pin/Row | Dimension |      |
|    |                  | A         | B    |
|    | 02               | 2.0       | 4.0  |
|    | 03               | 4.0       | 6.0  |
|    | 04               | 6.0       | 8.0  |
|    | 05               | 8.0       | 10.0 |
|    | 06               | 10.0      | 12.0 |
|    | 07               | 12.0      | 14.0 |
|    | 08               | 14.0      | 16.0 |
|    | 09               | 16.0      | 18.0 |
|    | 10               | 18.0      | 20.0 |
|    | 11               | 20.0      | 22.0 |
|    | 12               | 22.0      | 24.0 |
|    | 13               | 24.0      | 26.0 |
|    | 14               | 26.0      | 28.0 |
|    | 15               | 28.0      | 30.0 |
|    | 16               | 30.0      | 32.0 |
|    | 17               | 32.0      | 34.0 |
|    | 18               | 34.0      | 36.0 |
|    | 19               | 36.0      | 38.0 |
|    | 20               | 38.0      | 40.0 |
|    | 21               | 40.0      | 42.0 |
|    | 22               | 42.0      | 44.0 |
|    | 23               | 44.0      | 46.0 |
|    | 24               | 46.0      | 48.0 |
|    | 25               | 48.0      | 50.0 |
|    | 26               | 50.0      | 52.0 |
|    | 27               | 52.0      | 54.0 |
|    | 28               | 54.0      | 56.0 |
|    | 29               | 56.0      | 58.0 |
|    | 30               | 58.0      | 60.0 |
|    | 31               | 60.0      | 62.0 |
|    | 32               | 62.0      | 64.0 |
|    | 33               | 64.0      | 66.0 |
|    | 34               | 66.0      | 68.0 |
|    | 35               | 68.0      | 70.0 |
|    | 36               | 70.0      | 72.0 |
|    | 37               | 72.0      | 74.0 |
|    | 38               | 74.0      | 76.0 |
|    | 39               | 76.0      | 78.0 |
| 40 | 78.0             | 80.0      |      |
| A  |                  |           |      |

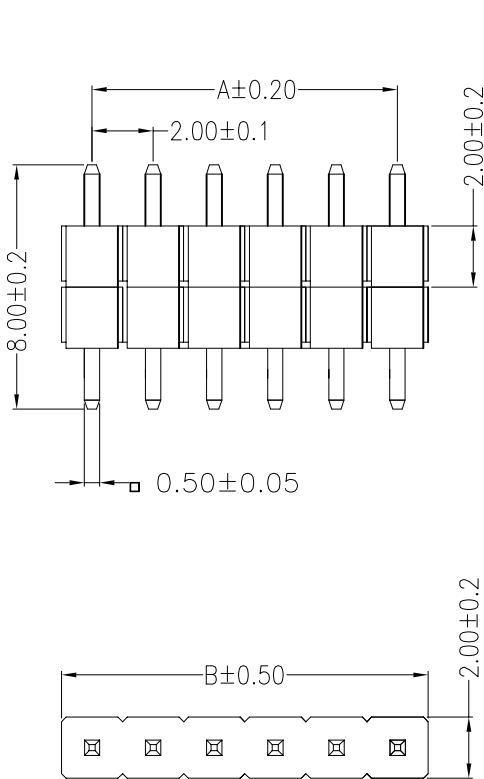

| REV | DESCRIPTION         | DESIGN    | DATE       |
|-----|---------------------|-----------|------------|
| A   | NEW RELEASE         | J.Y.Jiang | 2018.08.22 |
| B   | Size 3.5 Change 2.5 | J.Y.Jiang | 2024.04.22 |
| C   | Size 2.5 Change 2.0 | J.Y.Jiang | 2024.05.15 |

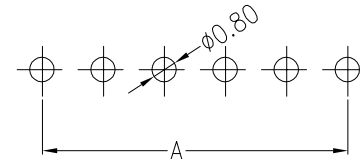

**Board Layout**  
**General Tolerance:  $\pm 0.05$**


#### Specifications:

Contact resistance:  $\leq 20\text{m}\Omega$   
Insulation resistance:  $\geq 1000\text{M}\Omega$   
Rated voltage: 250V AC DC  
Rated current: 3.0A AC DC  
Withstand Voltage: 500V AC/minute  
Temperature Range:  $-40^\circ\text{C} \sim +105^\circ\text{C}$   
Housing: PA6T UL94V-0, BLACK  
Contacts: Brass/GOLD-FLASH

#### ORDER INFORMATION:





|                     |  |               |                |
|---------------------|--|---------------|----------------|
| L2006S-**-C1KC2-P-1 |  |               |                |
| PART No.            |  | Special code: | 1=2.0*H4.0*2.0 |
| No.OF CIRCUITS:     |  | PACKAGING:    | P=PE           |
| **                  |  | Metal code:   | 2=Brass        |
| PLASTIC MATERIAL:   |  | PLATING:      | C=GOLD-FLASH   |
| C1K=PA6T(BLACK)     |  |               |                |

|                                                            |                    |                    |  |                                         |                |
|------------------------------------------------------------|--------------------|--------------------|--|-----------------------------------------|----------------|
| <b>JKUN</b> 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |                    |                    |  | TITLE:<br>2.0mmPITCH 180°WAFER DIP TYPE |                |
| GENERAL TOLERANCE                                          |                    | USE:               |  | PART NO.:                               |                |
| X.X $\pm 0.30$                                             | X. $\pm 5^\circ$   | CUSTOMER           |  | L2006S-**-C1KC2-P-1                     |                |
| X.XX $\pm 0.20$                                            | X.X $\pm 2^\circ$  | APPD:<br>J. J. Yao |  | DWG NO.:                                |                |
| X.XXX $\pm 0.10$                                           | X.XX $\pm 1^\circ$ | CHKD:<br>X. F. Yan |  | -                                       |                |
| UNITS:<br>mm                                               |                    | DR:<br>J. Y. Jiang |  | SCALE<br>1 : 1                          | SHEET<br>1 / 1 |

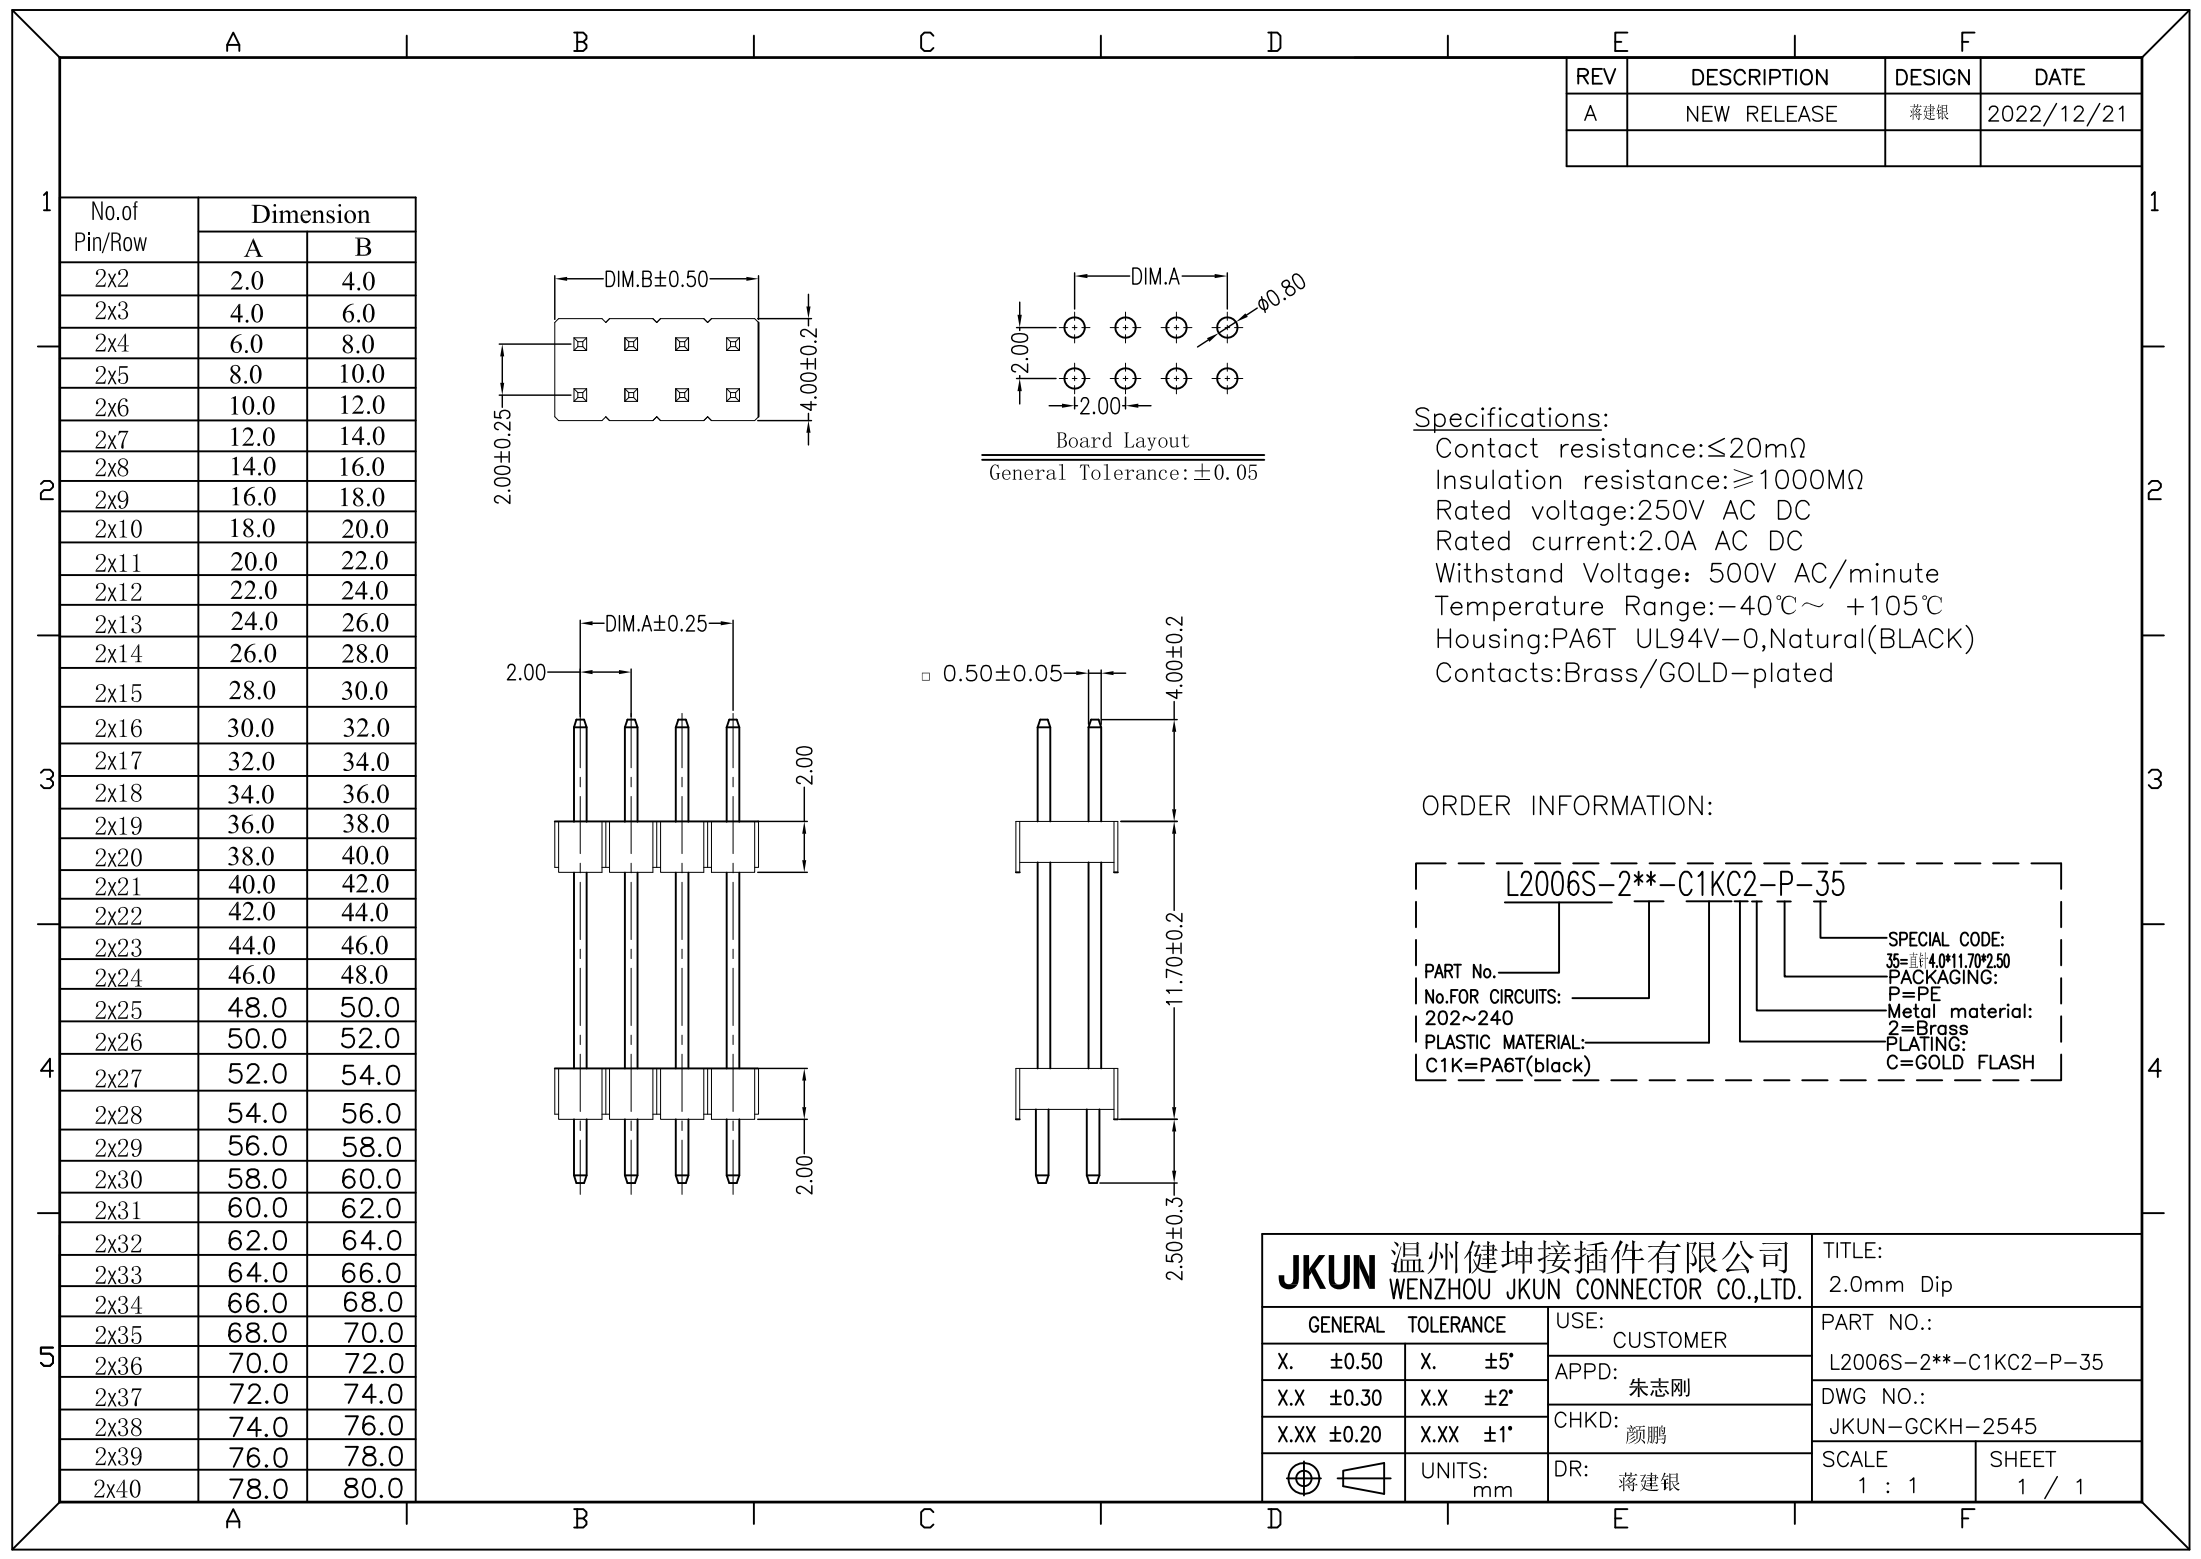


| REV | DESCRIPTION | DESIGN | DATE       |
|-----|-------------|--------|------------|
| A   | NEW RELEASE | 蒋建银    | 2022/12/21 |
|     |             |        |            |


|   | No.of<br>Pin/Row | Dimension |      |
|---|------------------|-----------|------|
|   |                  | A         | B    |
| 1 | 2x2              | 2.0       | 4.0  |
|   | 2x3              | 4.0       | 6.0  |
|   | 2x4              | 6.0       | 8.0  |
|   | 2x5              | 8.0       | 10.0 |
|   | 2x6              | 10.0      | 12.0 |
|   | 2x7              | 12.0      | 14.0 |
|   | 2x8              | 14.0      | 16.0 |
|   | 2x9              | 16.0      | 18.0 |
| 2 | 2x10             | 18.0      | 20.0 |
|   | 2x11             | 20.0      | 22.0 |
|   | 2x12             | 22.0      | 24.0 |
|   | 2x13             | 24.0      | 26.0 |
|   | 2x14             | 26.0      | 28.0 |
|   | 2x15             | 28.0      | 30.0 |
|   | 2x16             | 30.0      | 32.0 |
|   | 2x17             | 32.0      | 34.0 |
| 3 | 2x18             | 34.0      | 36.0 |
|   | 2x19             | 36.0      | 38.0 |
|   | 2x20             | 38.0      | 40.0 |
|   | 2x21             | 40.0      | 42.0 |
|   | 2x22             | 42.0      | 44.0 |
|   | 2x23             | 44.0      | 46.0 |
|   | 2x24             | 46.0      | 48.0 |
|   | 2x25             | 48.0      | 50.0 |
| 4 | 2x26             | 50.0      | 52.0 |
|   | 2x27             | 52.0      | 54.0 |
|   | 2x28             | 54.0      | 56.0 |
|   | 2x29             | 56.0      | 58.0 |
|   | 2x30             | 58.0      | 60.0 |
|   | 2x31             | 60.0      | 62.0 |
|   | 2x32             | 62.0      | 64.0 |
|   | 2x33             | 64.0      | 66.0 |
| 5 | 2x34             | 66.0      | 68.0 |
|   | 2x35             | 68.0      | 70.0 |
|   | 2x36             | 70.0      | 72.0 |
|   | 2x37             | 72.0      | 74.0 |
|   | 2x38             | 74.0      | 76.0 |
|   | 2x39             | 76.0      | 78.0 |
|   | 2x40             | 78.0      | 80.0 |

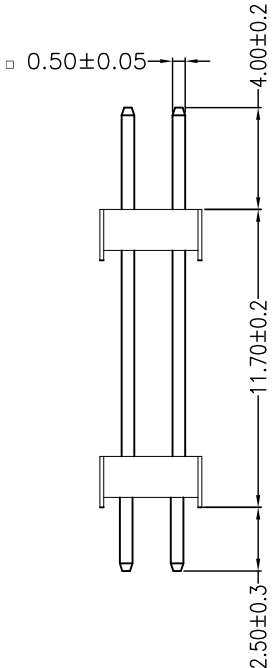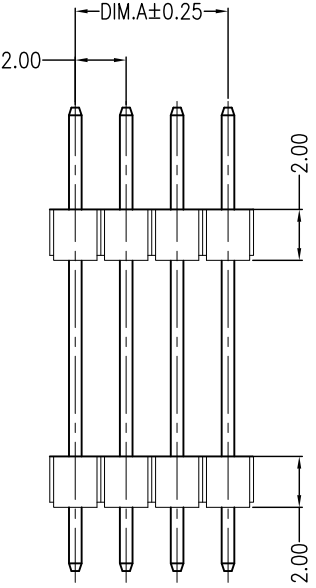




Specifications:  
Contact resistance:≤20mΩ  
Insulation resistance:≥1000MΩ  
Rated voltage:250V AC DC  
Rated current:2.0A AC DC  
Withstand Voltage: 500V AC/minute  
Temperature Range:−40℃~ +105℃  
Housing:PA6T UL94V-0,Natural(BLACK)  
Contacts:Brass/GOLD-plated

ORDER INFORMATION:

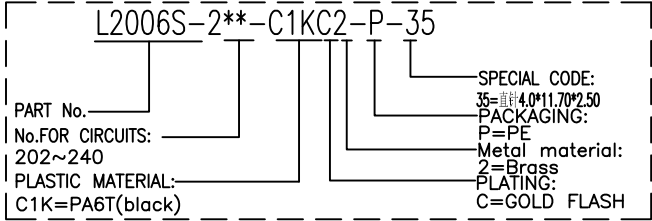

|                                                                                       |          |                  |  |                                    |  |
|---------------------------------------------------------------------------------------|----------|------------------|--|------------------------------------|--|
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD.                                   |          |                  |  | TITLE:<br>2.0mm Dip                |  |
| GENERAL TOLERANCE                                                                     |          | USE:<br>CUSTOMER |  | PART NO.:<br>L2006S-2**-C1KC2-P-35 |  |
| X. ±0.50                                                                              | X. ±5°   | APPD:<br>朱志刚     |  |                                    |  |
| X.X ±0.30                                                                             | X.X ±2°  | CHKD:<br>颜鹏      |  | DWG NO.:<br>JKUN-GCKH-2545         |  |
| X.XX ±0.20                                                                            | X.XX ±1° |                  |  |                                    |  |
|  |          | UNITS:<br>mm     |  | DR:<br>蒋建银                         |  |
|                                                                                       |          |                  |  | SCALE<br>1 : 1                     |  |
|                                                                                       |          |                  |  | SHEET<br>1 / 1                     |  |

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A0  |         | Release     | 蒋建银    | 2019.07.22 |
|     |         |             |        |            |

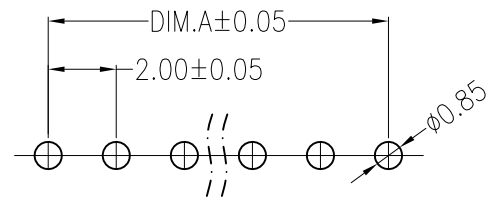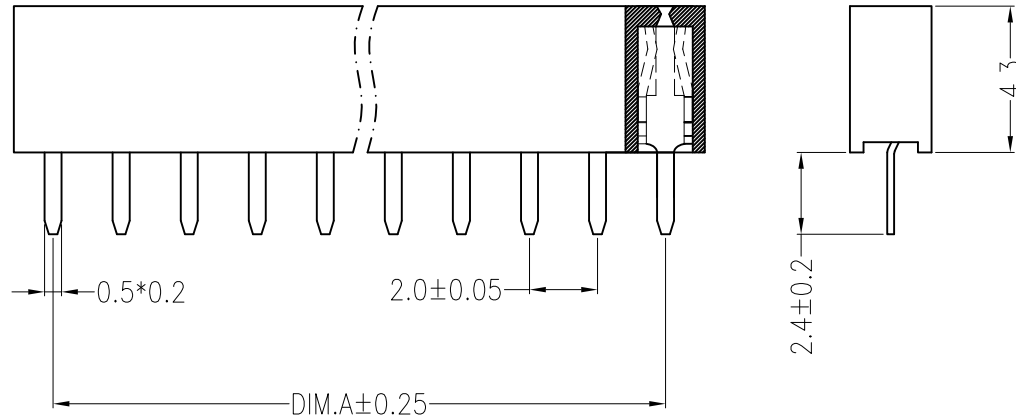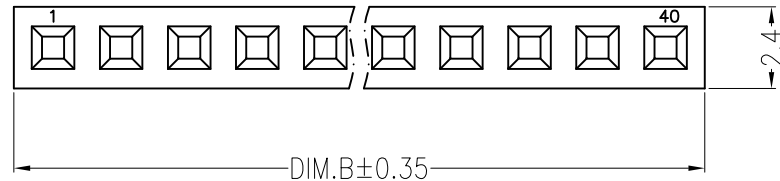

P.C.B Hole Layout

### 主要技术参数 Main Specifications


线 数 (Poles): 02 to 60  
接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$   
绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$   
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range):  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

### ORDER INFORMATION:

|                     |                 |
|---------------------|-----------------|
| L2006Y-**-C1KC2-*-3 |                 |
| PART No.            | SPECIAL CODE:   |
| No. FOR CIRCUITS:   | 3=4, 3*2.4      |
| **                  | PACKAGING:      |
|                     | G=TUBE B=BOX    |
|                     | P=PE            |
| PLASTIC MATERIAL:   | Metal material: |
| C1K=PA6T (black)    | 2=Brass         |
|                     | PLATING:        |
|                     | C=GOLD FLASH    |

| No.of Pin/Row | Dimension |      |
|---------------|-----------|------|
|               | A         | B    |
| 02            | 2.0       | 4.6  |
| 03            | 4.0       | 6.6  |
| 04            | 6.0       | 8.6  |
| 05            | 8.0       | 10.6 |
| 06            | 10.0      | 12.6 |
| 07            | 12.0      | 14.6 |
| 08            | 14.0      | 16.6 |
| 09            | 16.0      | 18.6 |
| 10            | 18.0      | 20.6 |
| 11            | 20.0      | 22.6 |
| 12            | 22.0      | 24.6 |
| 13            | 24.0      | 26.6 |
| 14            | 26.0      | 28.6 |
| 15            | 28.0      | 30.6 |
| 16            | 30.0      | 32.6 |
| 17            | 32.0      | 34.6 |
| 18            | 34.0      | 36.6 |
| 19            | 36.0      | 38.6 |
| 20            | 38.0      | 40.6 |
| 21            | 40.0      | 42.6 |
| 22            | 42.0      | 44.6 |
| 23            | 44.0      | 46.6 |
| 24            | 46.0      | 48.6 |
| 25            | 48.0      | 50.6 |
| 26            | 50.0      | 52.6 |
| 27            | 52.0      | 54.6 |
| 28            | 54.0      | 56.6 |
| 29            | 56.0      | 58.6 |
| 30            | 58.0      | 60.6 |
| 31            | 60.0      | 62.6 |
| 32            | 62.0      | 64.6 |
| 33            | 64.0      | 66.6 |
| 34            | 66.0      | 68.6 |
| 35            | 68.0      | 70.6 |
| 36            | 70.0      | 72.6 |
| 37            | 72.0      | 74.6 |
| 38            | 74.0      | 76.6 |
| 39            | 76.0      | 78.6 |
| 40            | 78.0      | 80.6 |

|                                                     |           |        |           |               |
|-----------------------------------------------------|-----------|--------|-----------|---------------|
| C                                                   |           |        |           |               |
| B                                                   | CONTACT   |        | 02~40 PCS | Copper Alloy  |
| A                                                   | HOUSING   |        | 1 PCS     | PA6T          |
| ITEM                                                | COMPONENT | Q'TY   | MATERIAL  | FINISH        |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |           |        |           | TITLE: -<br>- |
| X.±0.5                                              | X.±5°     | USE:   | CUSTOMER  |               |
| .X±0.3                                              | .X±2°     | APPD:  | 刘振岭       |               |
| .XX±0.25                                            | .XX±1°    | CHKD:  | 王亮        |               |
| --                                                  | --        | DR:    | 蒋建银       |               |
| ⊕                                                   | ⊕         | UNITS: | mm        |               |
|                                                     |           |        | SCALE     | SHEET         |
|                                                     |           |        | 1 : 1     | 1 / 1         |

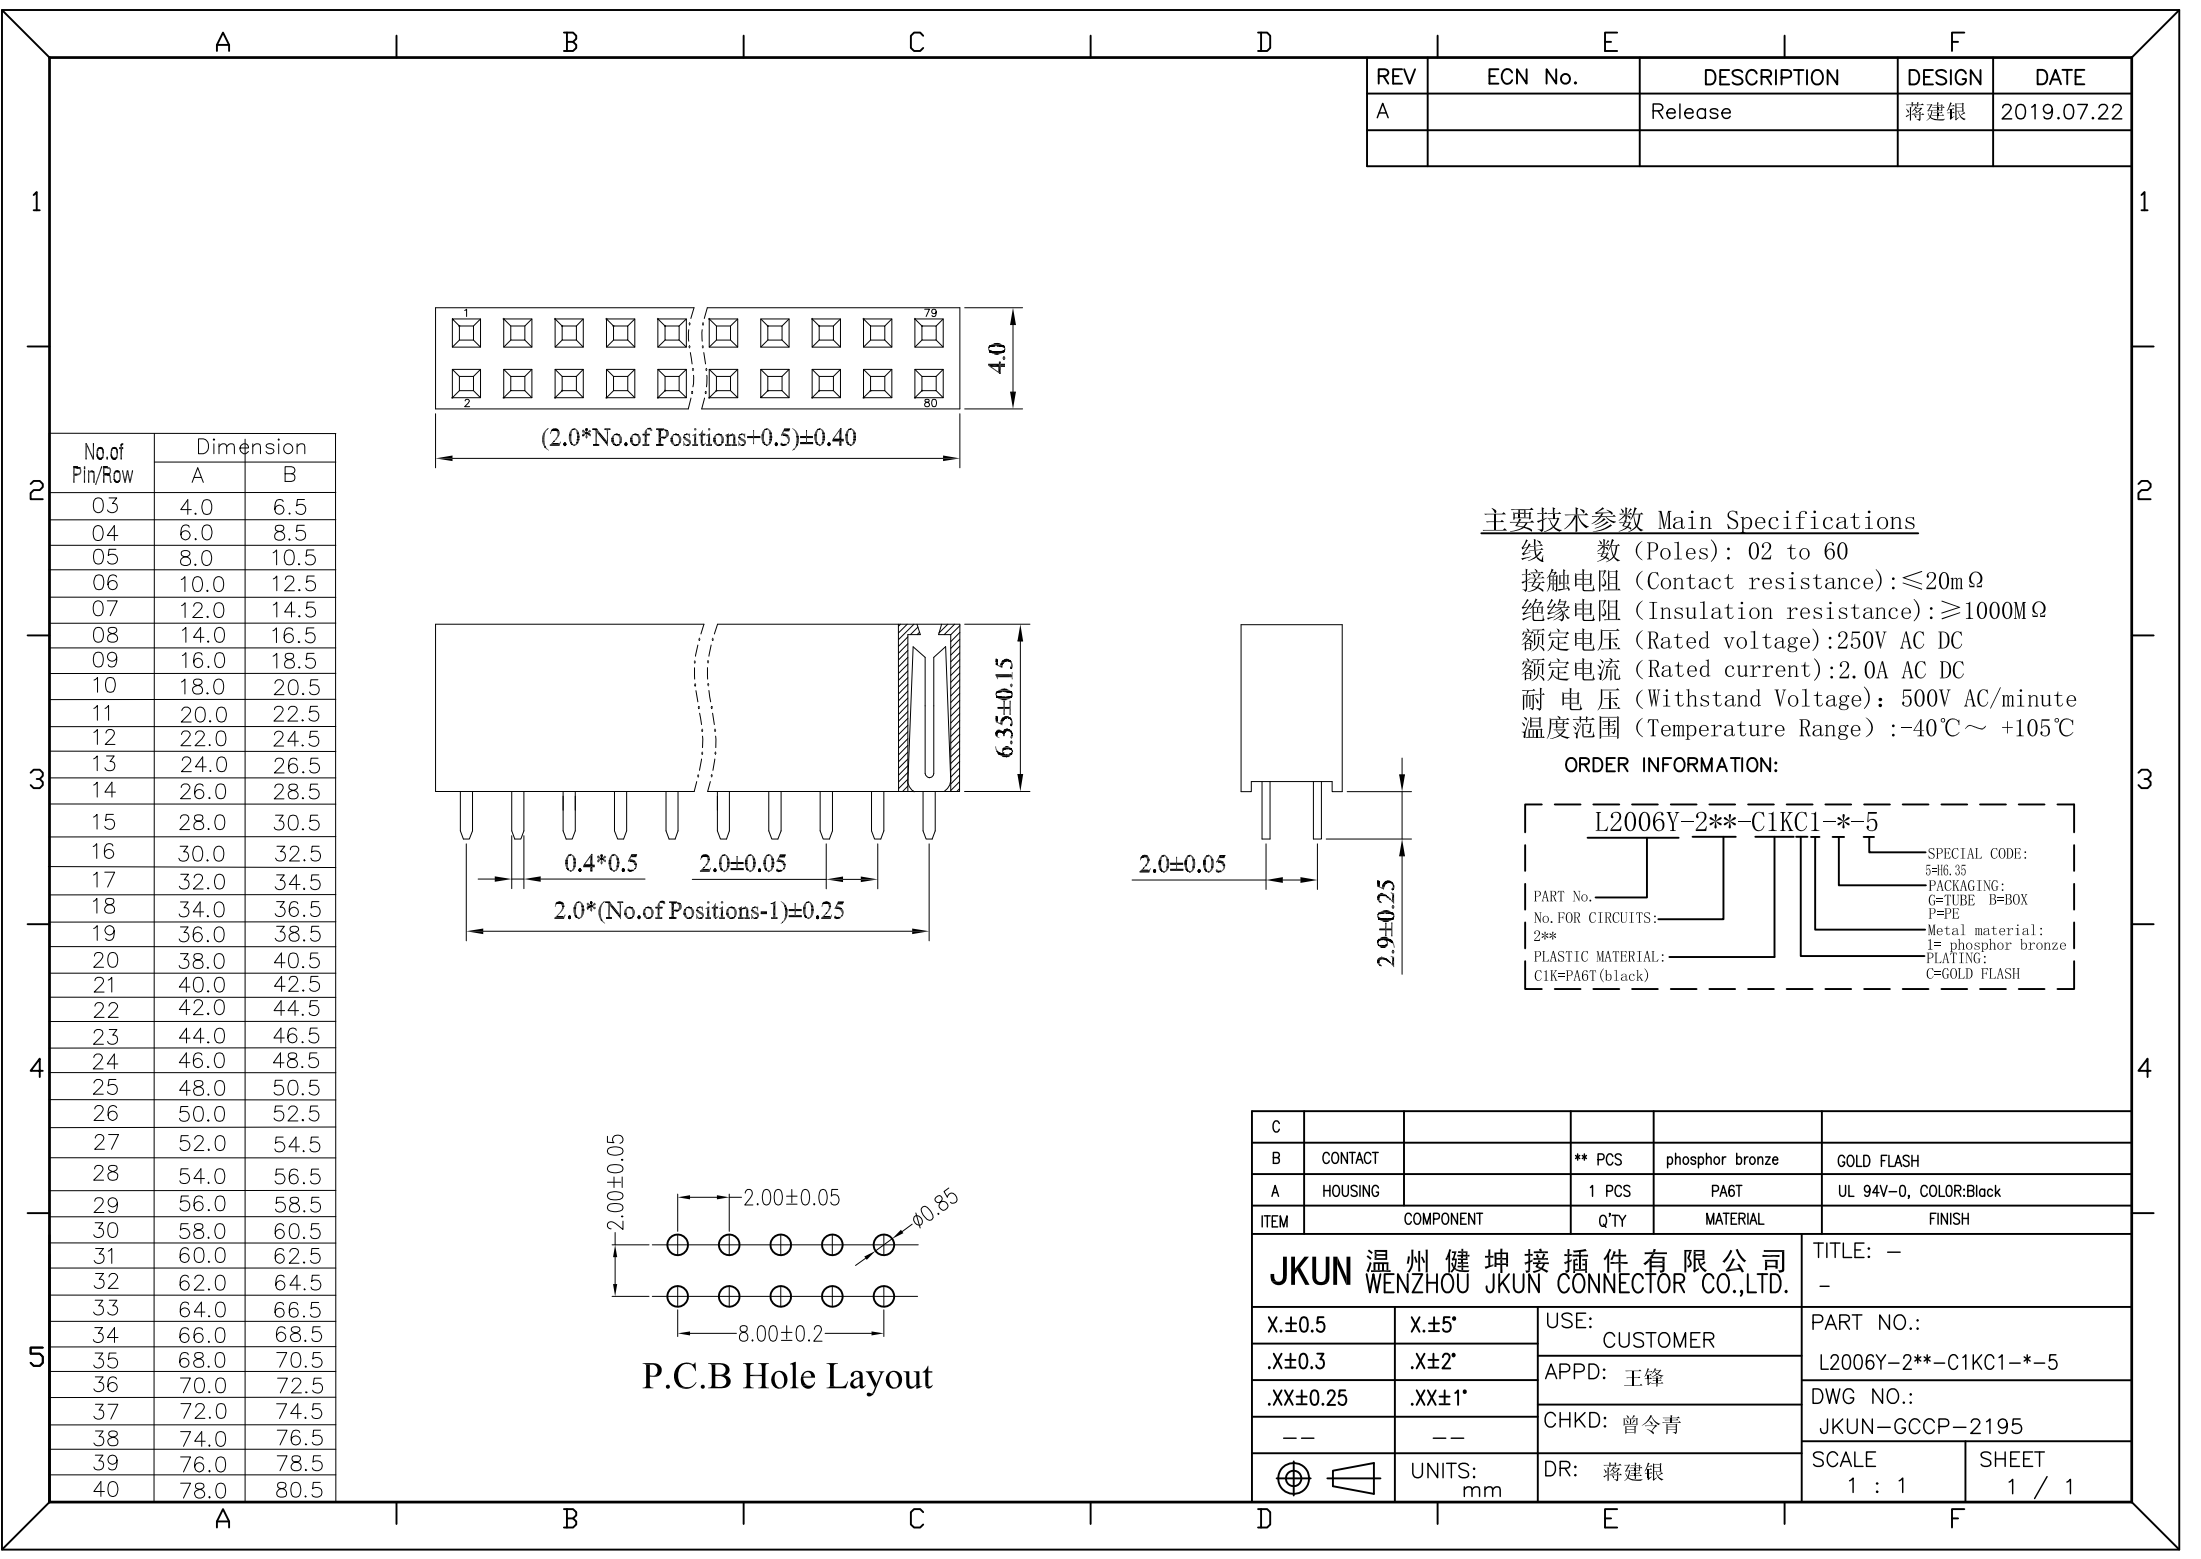

| REV | ECN No. | DESCRIPTION | DESIGN | DATE       |
|-----|---------|-------------|--------|------------|
| A   |         | Release     | 蒋建银    | 2019.07.22 |
|     |         |             |        |            |

|   | No. of Pin/Row | Dimension |      |
|---|----------------|-----------|------|
|   |                | A         | B    |
| 2 | 03             | 4.0       | 6.5  |
|   | 04             | 6.0       | 8.5  |
|   | 05             | 8.0       | 10.5 |
|   | 06             | 10.0      | 12.5 |
|   | 07             | 12.0      | 14.5 |
|   | 08             | 14.0      | 16.5 |
|   | 09             | 16.0      | 18.5 |
|   | 10             | 18.0      | 20.5 |
|   | 11             | 20.0      | 22.5 |
|   | 12             | 22.0      | 24.5 |
| 3 | 13             | 24.0      | 26.5 |
|   | 14             | 26.0      | 28.5 |
|   | 15             | 28.0      | 30.5 |
|   | 16             | 30.0      | 32.5 |
|   | 17             | 32.0      | 34.5 |
|   | 18             | 34.0      | 36.5 |
|   | 19             | 36.0      | 38.5 |
|   | 20             | 38.0      | 40.5 |
|   | 21             | 40.0      | 42.5 |
|   | 22             | 42.0      | 44.5 |
| 4 | 23             | 44.0      | 46.5 |
|   | 24             | 46.0      | 48.5 |
|   | 25             | 48.0      | 50.5 |
|   | 26             | 50.0      | 52.5 |
|   | 27             | 52.0      | 54.5 |
|   | 28             | 54.0      | 56.5 |
|   | 29             | 56.0      | 58.5 |
|   | 30             | 58.0      | 60.5 |
|   | 31             | 60.0      | 62.5 |
|   | 32             | 62.0      | 64.5 |
| 5 | 33             | 64.0      | 66.5 |
|   | 34             | 66.0      | 68.5 |
|   | 35             | 68.0      | 70.5 |
|   | 36             | 70.0      | 72.5 |
|   | 37             | 72.0      | 74.5 |
|   | 38             | 74.0      | 76.5 |
|   | 39             | 76.0      | 78.5 |
|   | 40             | 78.0      | 80.5 |

主要技术参数 Main Specifications

线 数 (Poles): 02 to 60  
接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$   
绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$   
额定电压 (Rated voltage): 250V AC DC  
额定电流 (Rated current): 2.0A AC DC  
耐 电 压 (Withstand Voltage): 500V AC/minute  
温度范围 (Temperature Range):  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

ORDER INFORMATION:

|                                       |  |                                                                                                                                      |
|---------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------|
| L2006Y-2**-C1KC1-*-5                  |  | SPECIAL CODE:<br>5=16, 35<br>PACKAGING:<br>G=TUBE B=BOX<br>P=PE<br>Metal material:<br>1= phosphor bronze<br>PLATING:<br>C=GOLD FLASH |
| PART No.                              |  |                                                                                                                                      |
| No. FOR CIRCUITS:                     |  |                                                                                                                                      |
| 2**                                   |  |                                                                                                                                      |
| PLASTIC MATERIAL:<br>C1K=PA6T (black) |  |                                                                                                                                      |

|                                                     |              |                  |                      |                 |
|-----------------------------------------------------|--------------|------------------|----------------------|-----------------|
| C                                                   |              |                  |                      |                 |
| B                                                   | CONTACT      |                  | ** PCS               | phosphor bronze |
| A                                                   | HOUSING      |                  | 1 PCS                | PA6T            |
| ITEM                                                | COMPONENT    |                  | Q'TY                 | MATERIAL        |
| JKUN 温州健坤接插件有限公司<br>WENZHOU JKUN CONNECTOR CO.,LTD. |              |                  |                      | TITLE: -<br>-   |
| X.±0.5                                              | X.±5°        | USE:<br>CUSTOMER | PART NO.:            |                 |
| .X±0.3                                              | .X±2°        |                  | L2006Y-2**-C1KC1-*~5 |                 |
| .XX±0.25                                            | .XX±1°       |                  | DWG NO.:             |                 |
| --                                                  | --           | CHKD: 曾令青        | JKUN-GCCP-2195       |                 |
|                                                     | UNITS:<br>mm | DR: 蒋建银          | SCALE<br>1 : 1       | SHEET<br>1 / 1  |